


**Inox A4****64943****Acton****AXE / GOUPILLE PERCEE**

PIN WITH HOLE

STECKBOLZEN

PASADOR PERFORADO

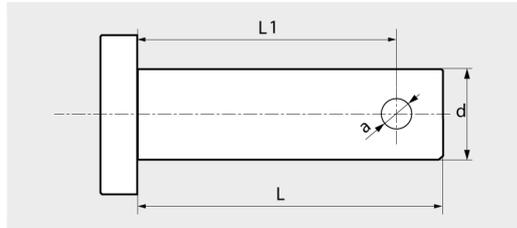

d x L	Code	L1	a	Cond.	Sur-cond.	kg/100
4X14	649434X14	11	2	10	380	0,250
4X20	649434X20	16	2	10	380	0,300
5X15	649435X15	11	2,5	10	380	0,360
5X18	649435X18	14	2,5	10	380	0,400
5X21	649435X21	17	2,5	10	380	0,450
6X15	649436X15	11	2,5	10	380	0,570
6X20	649436X20	16	2,5	10	380	0,620
6X25	649436X25	21	2,5	10	380	0,730
6X29	649436X29	25	2,5	10	380	0,820
6X36	649436X36	32	2,5	10	380	0,980
6X45	649436X45	41	2,5	10	380	1,180
8X21	649438X21	17	3	10	380	1,150
8X24	649438X24	20	3	10	380	1,270
8X27	649438X27	23	3	10	380	1,390
8X32	649438X32	28	3	10	380	1,600
9,5X26	649439,5X26	22	3	10	380	1,940
9,5X30	649439,5X30	26	3	10	380	2,170
10X30	6494310X30	26	3	5	190	2,400
11X30	6494311X30	25	3	5	190	2,950
12X30	6494312X30	26	3	5	190	3,490
14X41	6494314X41	36	4	5	190	6,330