

S.LA - DOUILLES 1/2" LONGUES 12 PANS MÉTRIQUES




Normes :


NF ISO 2725-1, NF ISO 1711-1, ISO 2725-1, ISO 1711-1, DIN 3124, ASME B107.5


Description :

- Profil OGV® : plus de puissance et de sécurité, préserve les écrous.
- Douilles longues dédiées aux accès en puits ou filetages longs.
- Présentation : chromée brillante.

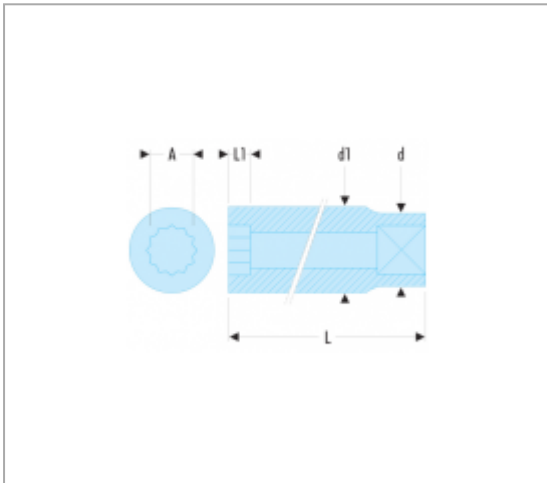

Références :

	A [MM]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	12 PANS [MM]	[G]
S.30LA	30	36,0	40,0	77	30	12	355
S.32LA	32	36,0	42,8	77	33	12	410
S.12LA	12	21,8	17,8	77	12	12	105
S.13LA	13	21,8	19,0	77	12	12	115
S.14LA	14	21,8	20,3	77	15	12	120
S.15LA	15	21,8	21,5	77	15	12	125
S.16LA	16	22,0	22,8	77	15	12	130
S.17LA	17	23,0	24,0	77	15	12	140

	A [MM]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	12 PANS [MM]	[G]
S.18LA	18	24,0	25,0	77	18	12	160
S.19LA	19	25,0	26,5	77	18	12	160
S.21LA	21	27,0	29,0	77	18	12	200
S.22LA	22	28,0	30,0	77	21	12	215
S.23LA	23	29,0	31,5	77	21	12	235
S.24LA	24	30,0	32,8	77	24	12	255
S.26LA	26	32,0	35,0	77	24	12	280
S.27LA	27	33,0	36,5	77	27	12	310
S.28LA	28	34,0	37,8	77	27	12	330
S.29LA	29	35,0	39,0	77	27	12	355