


VIS AUTOPERCEUSES TETE FRAISEE CARREE

SQUARE COUNTERSUNK HEAD SELF DRILLING SCREWS

BOHRSCHRAUBEN MIT SENKKOPF UND INNENVIERKANT

TORNILLOS AUTOTALADRANTES CABEZA AVELLANADA CUADRADA

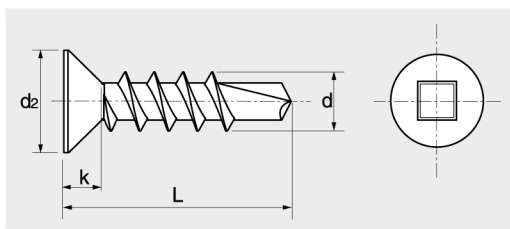

d	3,5 (6)	3,9 (7)	4,2 (8)	4,8 (10)
d2	6,8	7,5	8,1	9,5
k	2,1	2,3	2,5	3
●	1	2	2	2
Capacité de perçage	2,25	2,4	3	4,4

d x L	Code	Cond.	Sur-cond.	kg/100
3,5X13	333513,5X13CR3	500	19000	0,073
3,5X16	333513,5X16CR3	500	9000	0,085
3,5X19	333513,5X19CR3	500	9000	0,098
3,9X13	333513,9X13CR3	500	19000	0,092
3,9X16	333513,9X16CR3	500	9000	0,110
3,9X19	333513,9X19CR3	500	9000	0,126
3,9X25	333513,9X25CR3	500	9000	0,164
3,9X32	333513,9X32CR3	500	4000	0,200
3,9X38	333513,9X38CR3	500	4000	0,249
4,2X16	333514,2X16CR3	500	9000	0,127
4,2X19	333514,2X19CR3	500	9000	0,146
4,2X22	333514,2X22CR3	500	9000	0,164
4,2X25	333514,2X25CR3	500	4000	0,183

d x L	Code	Cond.	Sur-cond.	kg/100
4,2X32	333514,2X32CR3	500	4000	0,238
4,2X38	333514,2X38CR3	500	4000	0,264
4,2X50	333514,2X50CR3	500	2000	0,339
4,8X19	333514,8X19CR3	500	9000	0,187
4,8X25	333514,8X25CR3	250	4500	0,237
4,8X32	333514,8X32CR3	250	2000	0,330
4,8X38	333514,8X38CR3	250	2000	0,344
4,8X45	333514,8X45CR3	250	2000	0,401
4,8X50	333514,8X50CR3	250	2000	0,442
4,8X60	333514,8X60CR3	250	1000	0,524
4,8X70	333514,8X70CR3	250	1000	0,606
4,8X80	333514,8X80CR3	250	500	0,689



Informations d'utilisation en début de chapitre / Using instructions: see page 183