


Anode tester CAPBs® sens

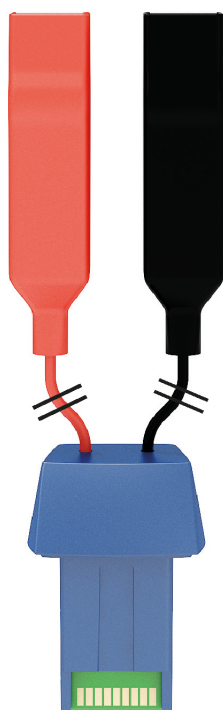

Application

CAPBs® sens AT 10 is used together with a CAPBs® handle to test sacrificial anodes installed in an isolated way at hot water tanks. To do so, disconnect the cable connection between the anode and the hot water tank and connect the terminals of the sensor module AT 10. AFRISO offers various conversion kits for isolated installation of standard sacrificial anodes (please enquire).

Description

Sensor module for the measurement of sacrificial anodes installed in an isolated way. The measured data is transmitted to a smartphone or a tablet via, for example, the integrated Bluetooth® interface of the base handle. In the case of measurements with less than 0.3 mA, the applet "Anode Test" recommends an anode replacement. The measurement can be documented with the app EuroSoft®, including comprehensive additional documentation.

Please note: Base handle BG 10 or CAPBs® device required.

Technical Specifications

Measuring range

0/60 mA

Resolution

0.01 mA

Connection anodes

terminals with 0.5 m cable

Versions

		Part no.
Anode tester CAPBs® sens AT 10		M090283910

-  in-stock items
-  Non-stock items