


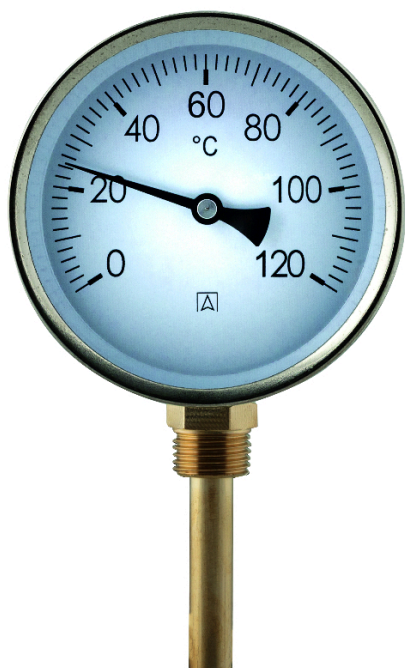

bimetal standard thermometer BiTh 100 ST

Part no. 64075

bimetal standard thermometer

benefits

- ranges: -20/+60, 0/60, 0/120, 0/160 °C
- brass thermowell
- stem brass or aluminium

Application


Heating, plumbing

Options

- other ranges
- Nominal size 34, 160

Technical Drawings

Bottom connection

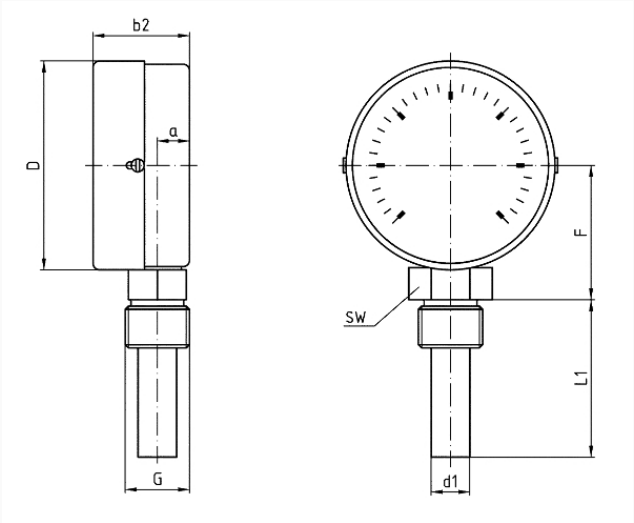

Dimensions (mm)

NG	a	b2	D	d1	F	G	L1	SW
63	10	35	63	12	29,3	G½B	40	19/22
63	10	35	63	12	29,3	G½B	63	19/22
63	10	35	63	12	29,3	G½B	100	19/22
63	10	35	63	12	29,3	G½B	150	19/22
80	10	33	80	12	47,3	G½B	40	19/22
80	10	33	80	12	47,3	G½B	63	19/22
80	10	33	80	12	47,3	G½B	100	19/22
80	10	33	80	12	47,3	G½B	150	19/22
100	10	40,5	100	12	59,3	G½B	40	19/22
100	10	40,5	100	12	59,3	G½B	63	19/22
100	10	40,5	100	12	59,3	G½B	100	19/22
100	10	40,5	100	12	59,3	G½B	150	19/22

Versions

housing ø	mounting position	Range	Stem length	Type	Part no.
100 mm	bottom	-20/+60 °C	100 mm	BiTh 100 ST	64075

-  in-stock items
-  Non-stock items