


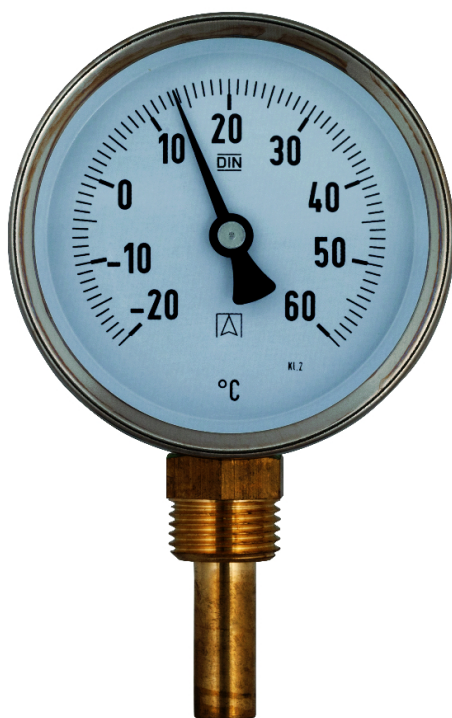

## bimetal standard thermometer BiTh 63 ST

Part no. 64042

bimetal standard thermometer

### benefits

- ranges:-20/+60, 0/60, 0/120, 0/160 °C
- brass thermowell
- stem brass or aluminium

### Application


Heating, plumbing

### Options

- other ranges
- Nominal size 34, 160

Technical Drawings

Bottom connection

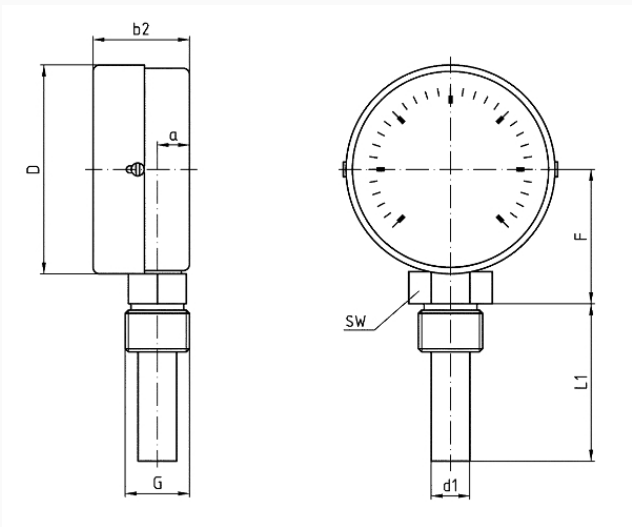

Dimensions (mm)

| NG  | a  | b2   | D   | d1 | F    | G   | L1  | SW    |
|-----|----|------|-----|----|------|-----|-----|-------|
| 63  | 10 | 35   | 63  | 12 | 29,3 | G½B | 40  | 19/22 |
| 63  | 10 | 35   | 63  | 12 | 29,3 | G½B | 63  | 19/22 |
| 63  | 10 | 35   | 63  | 12 | 29,3 | G½B | 100 | 19/22 |
| 63  | 10 | 35   | 63  | 12 | 29,3 | G½B | 150 | 19/22 |
| 80  | 10 | 33   | 80  | 12 | 47,3 | G½B | 40  | 19/22 |
| 80  | 10 | 33   | 80  | 12 | 47,3 | G½B | 63  | 19/22 |
| 80  | 10 | 33   | 80  | 12 | 47,3 | G½B | 100 | 19/22 |
| 80  | 10 | 33   | 80  | 12 | 47,3 | G½B | 150 | 19/22 |
| 100 | 10 | 40,5 | 100 | 12 | 59,3 | G½B | 40  | 19/22 |
| 100 | 10 | 40,5 | 100 | 12 | 59,3 | G½B | 63  | 19/22 |
| 100 | 10 | 40,5 | 100 | 12 | 59,3 | G½B | 100 | 19/22 |
| 100 | 10 | 40,5 | 100 | 12 | 59,3 | G½B | 150 | 19/22 |

Versions

| housing ø | mounting position | Range      | Stem length | Type       | Part no. |
|-----------|-------------------|------------|-------------|------------|----------|
| 63 mm     | bottom            | -20/+60 °C | 150 mm      | BiTh 63 ST | 64042    |

- in-stock items
- Non-stock items