



bimetal thermometer

benefits

- ideal for hygienic processes
- accuracy class 1 as per EN 13190
- for temperatures of the medium of up to 160 °C
- Process connection centre back or bottom or threads various thermo-wells

Application

For corrosive media. Meets high measuring demands, e.g. in process engineering as well as chemical and food industry applications.

Technical Specifications

Type

D4

Nominal size

160

measuring element

Bimetal helix

accuracy class

1 (EN 13190)

ranges °C

-20/+60

application area

continuous load: Full scale value
short-term: 1.1 x full scale value

operating pressure at stem

max. 6 bar

Degree of protection

IP 65 (EN 60529)

Connection

Stem: Stainless steel 316 Ti, Ø 8 mm, plain

mounting position

bottom

Dial

Aluminium, white
Scaling: black

Pointer

Aluminium, black

Housing

Stainless steel 304

bayonet bezel

Stainless steel 304

window


Instrument glass

Options

- Thermowell G $\frac{1}{2}$ B, stainless steel 316 Ti/316 L
- Grooved nut connection as per DIN 11851
- other connection designs
- other ranges
- other stem lengths
- laminated safety glass window
- Glycerine filling
- Every angle version
- back flange
- 3-hole fixing, panel mounting bezel
- special materials

Technical Drawings

bottom connection, plain

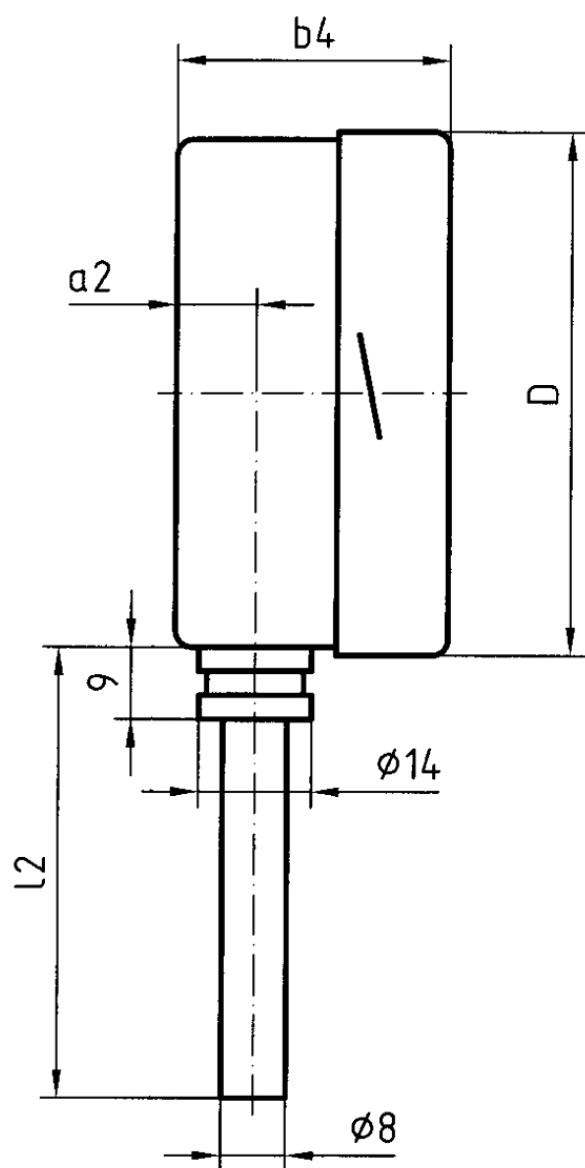

Dimensions (mm)

NG	a2	b4	D	l2
63	15,5	45	63	67
63	15,5	45	63	104
63	15,5	45	63	154
63	15,5	45	63	204
100	17,5	49,5	100	67
100	17,5	49,5	100	104
100	17,5	49,5	100	154
100	17,5	49,5	100	204
160	15,5	48	160	67
160	15,5	48	160	104
160	15,5	48	160	154
160	15,5	48	160	204

Versions

Type	housing ø	mounting position	Range	For thermowell with length L1	Type	Type		Part no.
BiTh 160 Ch	160 mm	bottom	-20/+60 °C	63 mm	BiTh 160 Ch	D402	●	66907402
BiTh 160 Ch	160 mm	bottom	-20/+60 °C	100 mm	BiTh 160 Ch	D402	●	66908402
BiTh 160 Ch	160 mm	bottom	-20/+60 °C	150 mm	BiTh 160 Ch	D402	●	66909402
BiTh 160 Ch	160 mm	bottom	-20/+60 °C	200 mm	BiTh 160 Ch	D402	●	66910402

● in-stock items

● Non-stock items