

boiler safety group assembly

benefits

- for protection against overpressure in drinking water heater heaters or systems
- with check valve
- with safety valve 6 or 10 bar



Application

For sealed hot drinking water systems or drinking water heaters as per EN 806, DIN 1988 and DIN 4753-1 and for protection against overpressure.

Description

Combination fitting with safety valve 6 bar or 10 bar, shut-off fitting, check valve and test screw. Noise characteristics as per DIN 4109 class 1.

Technical Specifications

Connections

compression fitting at both ends $\varnothing$ 15 mm

Flow coefficient Kvs

2.2 m³/h


Dimensions

W x H: 90 x 98 mm

Housing

Brass

Technical Drawings

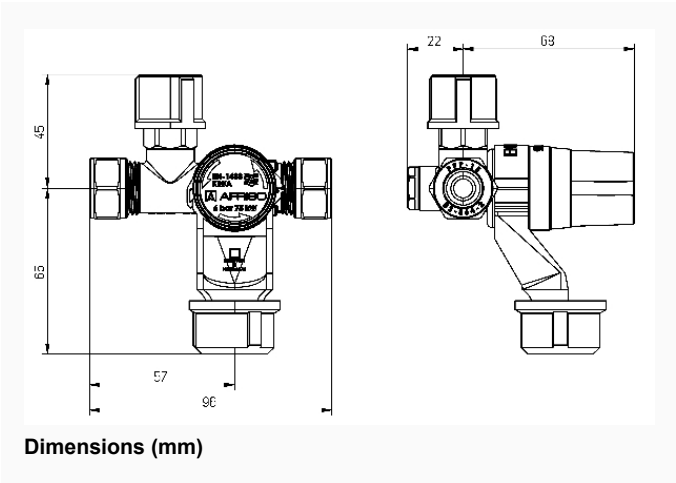

Versions

	Safety valve		Part no.
boiler safety group assembly BFK 12/6	6 bar	●	77986
boiler safety group assembly BFK 12/10	10 bar	●	77988

- in-stock items
- Non-stock items