



Bourdon tube pressure gauges with screw bezel housing type D6 with glycerine filling

benefits

- for machine and plant engineering
- extremely robust plastic housing (PA 6.6 GB30)
- laminated safety glass window
- higher accuracy class optional

Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys. For high measuring accuracy.
! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"

Technical Specifications

Type

D6

Nominal size

100

accuracy class (EN 837-1/6)

1.0

ranges (EN 837-1/5)

see ordering table

application area

≤ 600 bar: Full scale value
> 600 bar: $\frac{3}{4}$ x full scale value
≤ 600 bar: 0.9 x full scale value
> 600 bar: $\frac{2}{3}$ x full scale value
≤ 600 bar: 1.3 x full scale value
> 600 bar: Full scale value

Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$

falling temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$

of full scale value

Connection

Brass, bottom back

Measuring element

Bourdon tube

≤ 60 bar: "C" type tube, Copper alloy

> 60 bar: helical tube, stainless steel 316 Ti/316 L

movement

Brass

Dial

Aluminium, white
Scaling: black

Pointer

Aluminium, black

Housing

plastic (PA 6.6 GB30), with blow-out

Options

- higher accuracy class
- throttle screw
- special scales
- other process connections
- micro-adjustable pointer

Screw type bezel

plastic (PA 6.6 GB30)

window


Laminated safety glass

filling liquid

Glycerine

Technical Drawings

bottom back connection

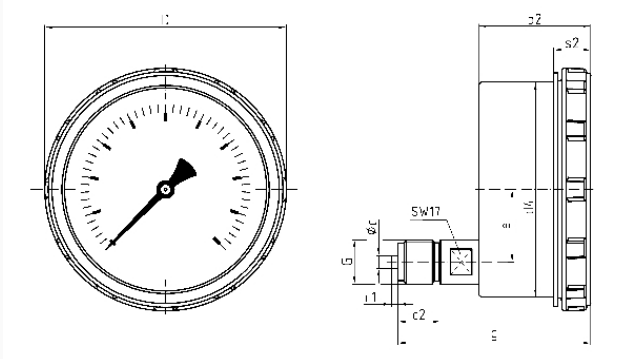

Dimensions (mm)

NG	b2	Øc	c1	c2	d4	D	e	G	g	s2
100	52,5	6	3	20	101	114	34	G½B	91	17,5

Versions

Range	Mounting type	Type		Part number
-1/+0 bar	direct	RF100GlySR D611	●	85201611
-1/+0.6 bar	direct	RF100GlySR D611	●	85202611
-1/+1.5 bar	direct	RF100GlySR D611	●	85203611
-1/+3 bar	direct	RF100GlySR D611	●	85204611
-1/+5 bar	direct	RF100GlySR D611	●	85205611
-1/+9 bar	direct	RF100GlySR D611	●	85206611
-1/+15 bar	direct	RF100GlySR D611	●	85207611
0/0.6 bar	direct	RF100GlySR D611	●	85209611
0/1 bar	direct	RF100GlySR D611	●	85210611
0/1.6 bar	direct	RF100GlySR D611	●	85211611
0/2.5 bar	direct	RF100GlySR D611	●	85212611
0/4 bar	direct	RF100GlySR D611	●	85213611
0/6 bar	direct	RF100GlySR D611	●	85214611
0/10 bar	direct	RF100GlySR D611	●	85215611
0/16 bar	direct	RF100GlySR D611	●	85216611
0/25 bar	direct	RF100GlySR D611	●	85217611
0/40 bar	direct	RF100GlySR D611	●	85218611
0/60 bar	direct	RF100GlySR D611	●	85219611

0/100 bar	direct	RF100GlySR D611	●	85220611
0/160 bar	direct	RF100GlySR D611	●	85221611
0/250 bar	direct	RF100GlySR D611	●	85222611
0/400 bar	direct	RF100GlySR D611	●	85223611
0/600 bar	direct	RF100GlySR D611	●	85224611
0/1000 bar	direct	RF100GlySR D611	●	85225611

● in-stock items

● Non-stock items