



Bourdon tube pressure gauge RF100ISR

Part no. 85324101

Bourdon tube pressure gauges with screw bezel housing type D1

benefits

- for machine and plant engineering
- extremely robust plastic housing (PA 6.6 GB30)
- laminated safety glass window
- higher accuracy class optional

Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys. For high measuring accuracy.
! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"

Technical Specifications

Type

D1

Nominal size

100

accuracy class (EN 837-1/6)

1.0

ranges (EN 837-1/5)

see ordering table

application area

≤ 600 bar: Full scale value
> 600 bar: $\frac{3}{4}$ x full scale value
≤ 600 bar: 0.9 x full scale value
> 600 bar: $\frac{2}{3}$ x full scale value
≤ 600 bar: 1.3 x full scale value
> 600 bar: Full scale value

Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$

falling temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$

of full scale value

Degree of protection

IP 65 (EN 60529)

standard version

Connection
Brass, bottom

Measuring element
Bourdon tube
≤ 60 bar: "C" type tube, Copper alloy
> 60 bar: helical tube, stainless steel 316 Ti/316 L

movement
Brass

Dial
Aluminium, white
Scaling: black

Options

- Glycerine filling (type D 6)
- higher accuracy class
- throttle screw
- special scales
- other process connections
- micro-adjustable pointer

Pointer
Aluminium, black


Housing
plastic (PA 6.6 GB30), with blow-out

Screw type bezel
plastic (PA 6.6 GB30)

window
Laminated safety glass

Technical Drawings

Bottom connection

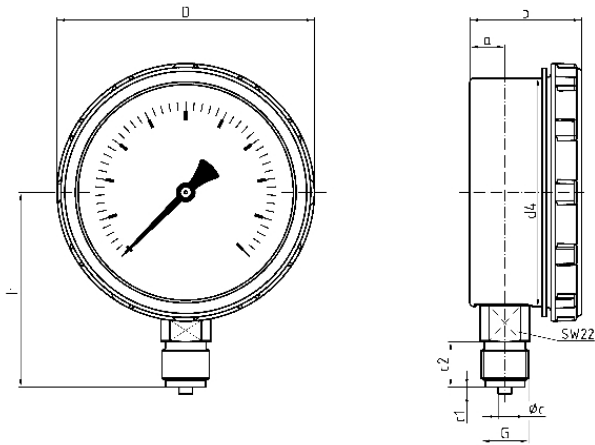

Dimensions (mm)

NG	a	b	Øc	c1	c2	d4	D	G	h
100	15,5	50	6	3	20	101	114	G½B	86

Versions

Range	Mounting type	Type	Part number
0/600 bar	direct	RF100ISR D101	85324101

- in-stock items
- Non-stock items