


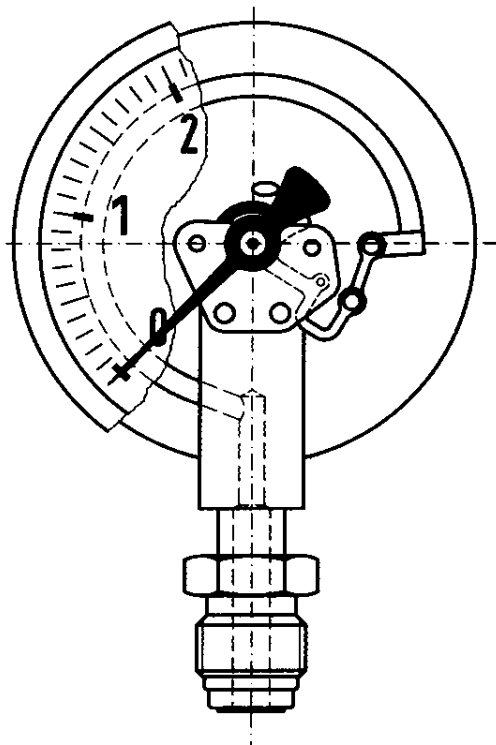

## Bourdon tube pressure gauge RF63RG

**Part no. 87122302**

**Bourdon tube pressure gauges for ultra-pure gas applications type D3**

### benefits

- wetted parts specially cleaned, flushed and electropolished
- tightness-tested with helium
- rear blow-out
- versatile connection technology
- GOSSTANDART-certified

### Application

Designed for highly demanding applications in terms of surface quality and purity of the wetted parts, particularly for measuring ultra-pure gases.  
! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

### Technical Specifications

#### Type

D3

#### Nominal size

63

#### accuracy class (EN 837-1/6)

1.6

#### ranges (EN 837-1/5)

see ordering table

#### Calibration medium

Nitrogen or dried air

#### application area

static load:  $\frac{1}{4}$  x full scale value

dynamic load:  $\frac{2}{3}$  x full scale value

short-term: Full scale value

#### Operating temperature range

Medium: max. 150 °C

Ambient: -20/+60 °C

#### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx.  $\pm 0.4$  %/10 K

falling temperature approx.  $\pm 0.4$  %/10 K

of full scale value

#### Degree of protection

IP 32 (EN 60529)

### standard version

**Connection**

stainless steel 316 Ti/316 L, bottom  
9/16-18 UNF, with union nut

**Measuring element**

Bourdon tube, stainless steel 316 Ti/316 L  
≤ 60 bar: "C" type tube  
> 60 bar: helical tube  
tightness-tested with helium,  
leak rate ≤ 10<sup>-9</sup> mbar x l/s

**wetted parts**

Connection, Measuring element  
stainless steel 316 Ti/316 L  
cleaned, flushed with nitrogen, electropolished, surface roughness  
≤ R<sub>a</sub> 0.6 µm

**movement**

Stainless steel

**Options**

- surface roughness R<sub>a</sub> 0.4 µm
- Housing polished
- Push on bezel polished
- Electrical contacts
- NG 50
- special scales
- other process connections

**Dial**

Aluminium, white  
Scaling: black  
label: ultra-pure gas

**Pointer**

Aluminium, black

**Housing**

Stainless steel 304, with rear blow-out

**push on bezel**


Stainless steel 304, bare metal surface

**window**

Plastic

Technical Drawings

Bottom connection, 9/16-18 UNF, with union nut

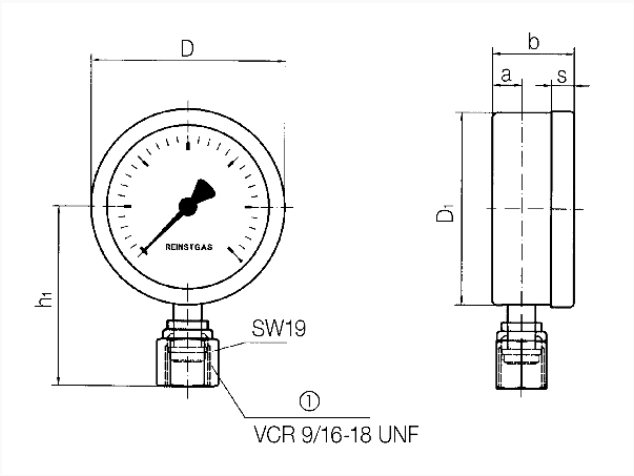

Union nut

Dimensions (mm)

| NG | a | b  | D  | D1 | h1 | s |
|----|---|----|----|----|----|---|
| 63 | 9 | 28 | 63 | 62 | 57 | 8 |

Versions

| Range     | Mounting type | Type           | Part number |
|-----------|---------------|----------------|-------------|
| 0/250 bar | direct        | RF63RG<br>D302 | 87122302    |

- ☒ in-stock items
- ☐ Non-stock items