



## Bourdon tube pressure gauges for chemical applications RF100Ch MK2

Part no. 87667402

Bourdon tube pressure gauge with electrical contacts for chemical applications type D4

### benefits

- measuring system fully welded to housing
- robust mechatronical pressure gauge
- Up to four switching contacts
- tightness-tested with helium
- GOSSTANDART-certified

### Application

For corrosive gaseous and liquid media which are not highly viscous and do not crystallise; suitable for corrosive environments.

### Technical Specifications

#### Type

D4

#### Nominal size

100

#### accuracy class (EN 837-1/6)

1.0

#### ranges (EN 837-1/5)

see ordering table

#### application area

≤ 600 bar: Full scale value  
 > 600 bar:  $\frac{3}{4}$  x full scale value  
 ≤ 600 bar: 0.9 x full scale value  
 > 600 bar:  $\frac{2}{3}$  x full scale value  
 ≤ 600 bar: 1.3 x full scale value  
 > 600 bar: Full scale value

### standard version

#### Connection

stainless steel 316 Ti/316 L, bottom  
 G $\frac{1}{2}$ B, SW22 (EN 837-1/7.3)

#### contact types

Magnetic spring contact (MK)

#### minimum range

MK dual  
 1.6 bar

#### Operating temperature range

Medium: max. 150 °C  
 Ambient: -20/+60 °C

#### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:  
 at rising temperature approx.  $\pm 0.4 \text{ } \%/10 \text{ K}$   
 falling temperature approx.  $\pm 0.4 \text{ } \%/10 \text{ K}$   
 of full scale value

#### Degree of protection

IP 54 (EN 60529)

#### Electrical connection

Junction box

**Measuring element**

Bourdon tube, stainless steel 316 Ti/316 L  
≤ 60 bar: "C" type tube  
> 60 bar: helical tube

**movement**

Stainless steel

**Dial**

Aluminium, white  
Scaling: black

**Magnetic spring contact (MK)****Supply voltage**

max. AC/DC 250 V

**Making current and breaking current**

max. 1 A

**Continuous current**

max. 0.6 A

**Switch rating**

max. 50 VA, max. 30 W

**Options**

- Liquid filling (silicone oil)
- back flange
- 3-hole fixing, panel mounting bezel
- throttle screw
- Connector
- special scales
- other process connections

**Pointer**

Aluminium, black

**Housing**

Stainless steel 304, with blow-out

**bayonet bezel**

Stainless steel 304

**window**

Plastic (Makrolon), with contact adjustment lock

**Contact**

Ag80 Ni20 Au 10 µm

**Switching accuracy**

approx. 2–5 % of full scale value


**Operating temperature range**

-20/+70 °C or corresponding to the respective measuring instruments

**Adjustment range**

5–95 % measuring range of gauge

Technical Drawings

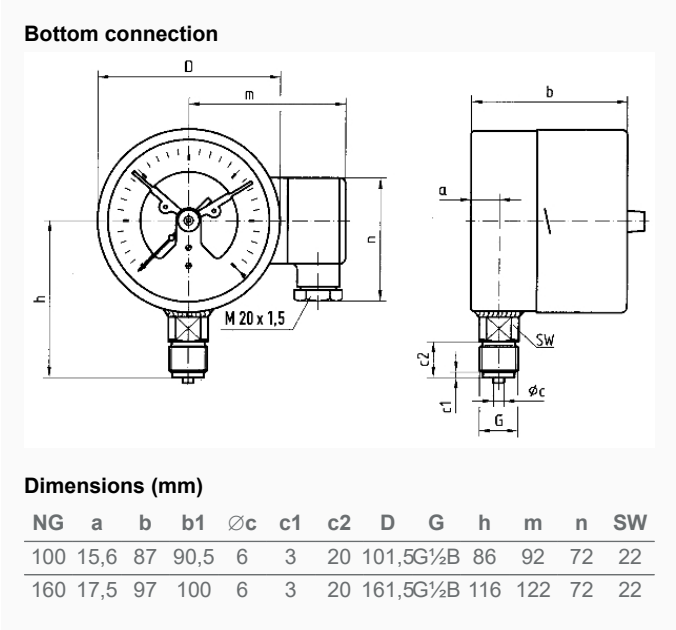

Versions

| Range    | Mounting type | Type                | Part number |
|----------|---------------|---------------------|-------------|
| 0/25 bar | direct        | RF100Ch MK2<br>D402 | 87667402    |

- in-stock items
- Non-stock items