


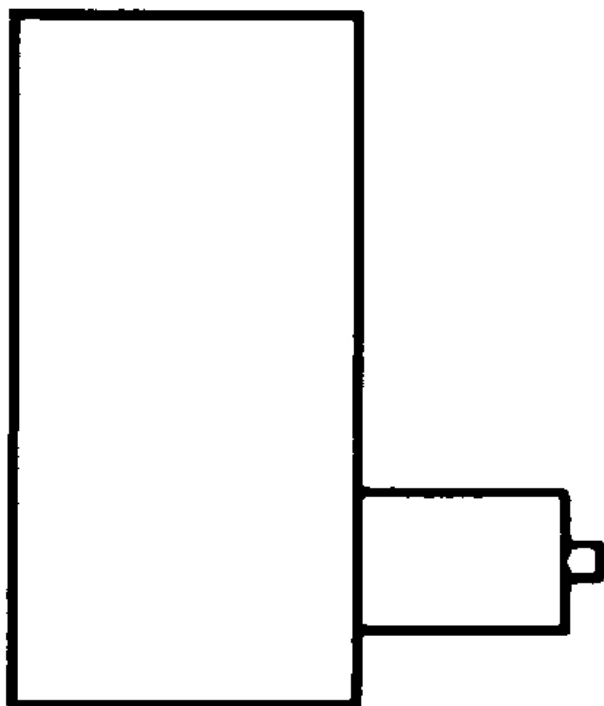

Bourdon tube pressure gauge for chemical applications type D8 with glycerine filling

benefits

- for chemical and process engineering applications
- measuring system fully welded to housing
- extremely robust design
- can be used in case of heavy vibrations and high, dynamic pressure loads
- tightness-tested with helium
- DNV- and GOSSTANDART-certified
- Ex version (optional)

Application

For corrosive gaseous and liquid media which are not highly viscous and do not crystallise; suitable for corrosive environments. For measurements in areas with high vibration levels and high, dynamic pressure loads.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

Technical Specifications

Type
D8

Nominal size
160

accuracy class (EN 837-1/6)
1.0

ranges (EN 837-1/5)
see ordering table

application area
 ≤ 600 bar: Full scale value
 > 600 bar: $\frac{3}{4}$ x full scale value
 ≤ 600 bar: 0.9 x full scale value
 > 600 bar: $\frac{2}{3}$ x full scale value
 ≤ 600 bar: 1.3 x full scale value
 > 600 bar: Full scale value

Operating temperature range

Medium: max. 100 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
 at rising temperature approx. ± 0.4 %/10 K
 falling temperature approx. ± 0.4 %/10 K
 of full scale value

Connection

stainless steel 316 Ti/316 L, bottom back

Measuring element

Bourdon tube, stainless steel 316 Ti/316 L
 ≤ 60 bar: "C" type tube
 > 60 bar: helical tube
 tightness-tested with helium

movement

Stainless steel

Dial

Aluminium, white

Scaling: black

Pointer

Aluminium, black

Housing

Stainless steel 304, with blow-out

bayonet bezel

Stainless steel 304

window

Laminated safety glass

filling liquid


glycerine (99.5 %)

Options

- Filling liquid silicone oil
- Brass movement
- back flange
- 3-hole fixing, panel mounting bezel
- Ex version
- Electrical contacts
- special scales
- other process connections

Technical Drawings

bottom back connection

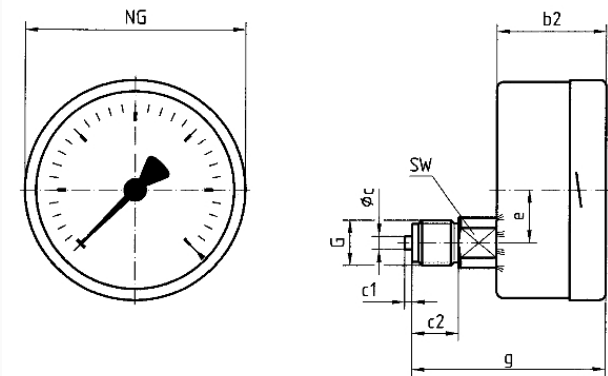

Dimensions (mm)

NG	b2	Øc	c1	c2	e	G	g	SW
100	49	6	3	20	34,5	G½B	83	22
160	50	6	3	20	34,5	G½B	84	22

Versions

Range	Mounting type	Type		Part number
-1/+0 bar	direct	RF160ChGly D812	●	85251812
-1/+0.6 bar	direct	RF160ChGly D812	●	85252812
-1/+1.5 bar	direct	RF160ChGly D812	●	85253812
-1/+3 bar	direct	RF160ChGly D812	●	85254812
-1/+5 bar	direct	RF160ChGly D812	●	85255812
-1/+9 bar	direct	RF160ChGly D812	●	85256812
-1/+15 bar	direct	RF160ChGly D812	●	85257812
0/0.6 bar	direct	RF160ChGly D812	●	85259812
0/1 bar	direct	RF160ChGly D812	●	85260812
0/1.6 bar	direct	RF160ChGly D812	●	85261812
0/2.5 bar	direct	RF160ChGly D812	●	85262812
0/4 bar	direct	RF160ChGly D812	●	85263812
0/6 bar	direct	RF160ChGly D812	●	85264812
0/10 bar	direct	RF160ChGly D812	●	85265812
0/16 bar	direct	RF160ChGly D812	●	85266812
0/25 bar	direct	RF160ChGly D812	●	85267812
0/40 bar	direct	RF160ChGly D812	●	85268812
0/60 bar	direct	RF160ChGly D812	●	85269812

0/100 bar	direct	RF160ChGly D812	●	85270812
0/160 bar	direct	RF160ChGly D812	●	85271812
0/250 bar	direct	RF160ChGly D812	●	85272812
0/400 bar	direct	RF160ChGly D812	●	85273812
0/600 bar	direct	RF160ChGly D812	●	85274812
0/1000 bar	direct	RF160ChGly D812	●	85275812
0/1600 bar	direct	RF160ChGly D812	●	85276812

- in-stock items
- Non-stock items