


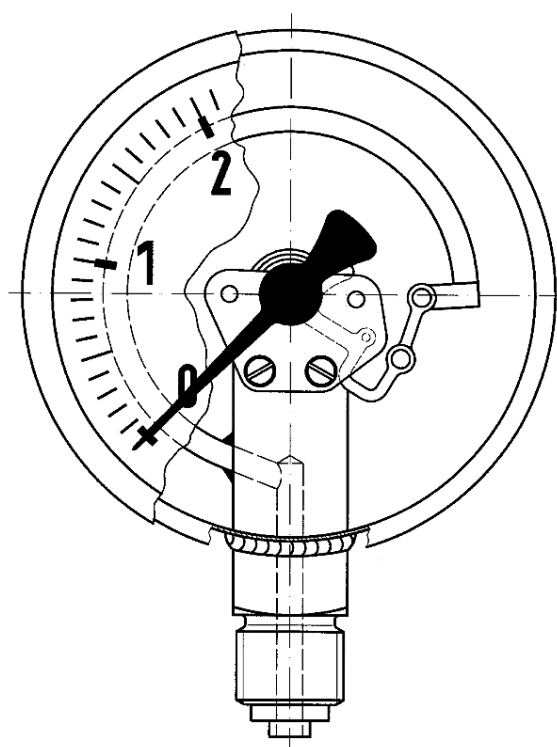

Bourdon tube pressure gauge for chemical applications type D4

benefits

- for chemical and process engineering applications
- measuring system fully welded to housing
- extremely robust design
- for temperatures of the medium of up to 200 °C
- tightness-tested with helium
- DNV- and GOSSTANDART-certified
- Ex version (optional)

Application

For corrosive gaseous and liquid media which are not highly viscous and do not crystallise; suitable for corrosive environments.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"!

Technical Specifications

Type
D4

Nominal size
160

accuracy class (EN 837-1/6)
1.0

ranges (EN 837-1/5)
see ordering table

Application area NG100/160
 ≤ 600 bar: Full scale value
 > 600 bar: $\frac{3}{4}$ x full scale value
 ≤ 600 bar: 0.9 x full scale value
 > 600 bar: $\frac{2}{3}$ x full scale value
 ≤ 600 bar: 1.3 x full scale value
 > 600 bar: Full scale value

Operating temperature range

Medium: max. 200 °C
 Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
 at rising temperature approx. ± 0.4 %/10 K
 falling temperature approx. ± 0.4 %/10 K
 of full scale value

Connection

Stainless steel 316 L, bottom back
 G $\frac{1}{2}$ B, SW22 (EN 837-1/7.3)

Measuring element

Bourdon tube, stainless steel 316 Ti/316 L
 ≤ 60 bar: "C" type tube
 > 60 bar: helical tube
 tightness-tested with helium

movement

Stainless steel

Dial

Aluminium, white

Scaling: black

Pointer

Aluminium, black

Housing

Stainless steel 304, with blow-out

bayonet bezel

Stainless steel 304

window


Laminated safety glass

Options

- back flange
- Panel mounting bezel
- 3-hole fixing, panel mounting bezel
- Ex version
- Crimped bezel, polished
- Electrical contacts
- special scales
- other process connections

Technical Drawings

bottom back connection

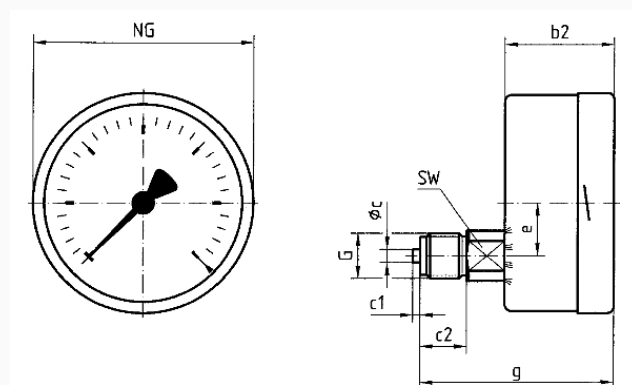

Dimensions (mm)

NG	b2	Øc	c1	c2	e	G	g	SW
100	49	6	3	20	34,5	G½B	83	22
160	50	6	3	20	34,5	G½B	84	22

Versions

Range	Mounting type	Type		Part number
-1/+0 bar	direct	RF160Ch D412	●	85251412
-1/+0.6 bar	direct	RF160Ch D412	●	85252412
-1/+1.5 bar	direct	RF160Ch D412	●	85253412
-1/+3 bar	direct	RF160Ch D412	●	85254412
-1/+5 bar	direct	RF160Ch D412	●	85255412
-1/+9 bar	direct	RF160Ch D412	●	85256412
-1/+15 bar	direct	RF160Ch D412	●	85257412
0/0.6 bar	direct	RF160Ch D412	●	85259412
0/1 bar	direct	RF160Ch D412	●	85260412
0/1.6 bar	direct	RF160Ch D412	●	85261412
0/2.5 bar	direct	RF160Ch D412	●	85262412
0/4 bar	direct	RF160Ch D412	●	85263412
0/6 bar	direct	RF160Ch D412	●	85264412
0/10 bar	direct	RF160Ch D412	●	85265412
0/16 bar	direct	RF160Ch D412	●	85266412
0/25 bar	direct	RF160Ch D412	●	85267412
0/40 bar	direct	RF160Ch D412	●	85268412
0/60 bar	direct	RF160Ch D412	●	85269412

0/100 bar	direct	RF160Ch D412	●	85270412
0/160 bar	direct	RF160Ch D412	●	85271412
0/250 bar	direct	RF160Ch D412	●	85272412
0/400 bar	direct	RF160Ch D412	●	85273412
0/600 bar	direct	RF160Ch D412	●	85274412
0/1000 bar	direct	RF160Ch D412	●	85275412
0/1600 bar	direct	RF160Ch D412	●	85276412

- in-stock items
- Non-stock items