


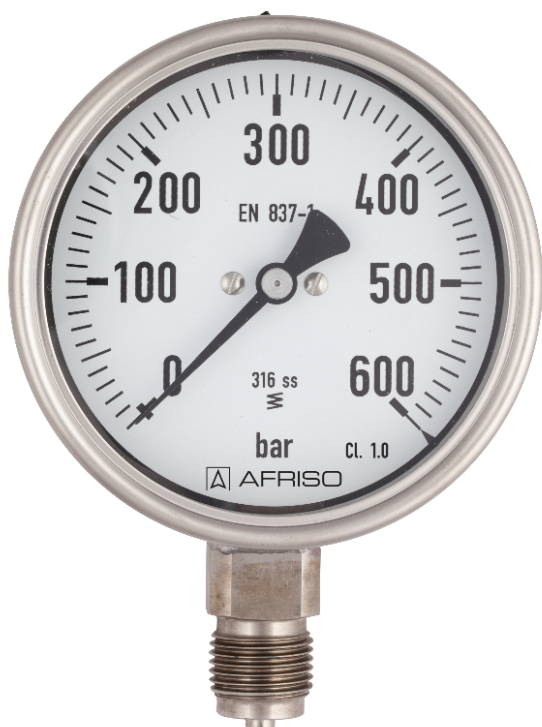

Bourdon tube pressure gauge for chemical applications type D4

benefits

- for chemical and process engineering applications
- measuring system fully welded to housing
- extremely robust design
- for temperatures of the medium of up to 200 °C
- tightness-tested with helium
- DNV- and GOSSTANDART-certified
- Ex version (optional)

Application

For corrosive gaseous and liquid media which are not highly viscous and do not crystallise; suitable for corrosive environments.
! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"!

Technical Specifications

Type

D4

Nominal size

160

accuracy class (EN 837-1/6)

1.0

ranges (EN 837-1/5)

see ordering table

Application area NG100/160

≤ 600 bar: Full scale value
> 600 bar: ¾ x full scale value
≤ 600 bar: 0.9 x full scale value
> 600 bar: ⅔ x full scale value
≤ 600 bar: 1.3 x full scale value
> 600 bar: Full scale value

Operating temperature range

Medium: max. 200 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
at rising temperature approx. ± 0.4 %/10 K
falling temperature approx. ± 0.4 %/10 K
of full scale value

Connection

Stainless steel 316 L, bottom

G½B, SW22 (EN 837-1/7.3)

Measuring element

Bourdon tube, stainless steel 316 Ti/316 L

≤ 60 bar: "C" type tube

> 60 bar: helical tube

tightness-tested with helium

movement
Stainless steel

Dial
Aluminium, white
Scaling: black

Pointer
Aluminium, black

Options

- back flange
- Panel mounting bezel
- 3-hole fixing, panel mounting bezel
- Ex version
- Crimped bezel, polished
- Electrical contacts
- special scales
- other process connections


Housing
Stainless steel 304, with blow-out

bayonet bezel
Stainless steel 304

window
Laminated safety glass

Technical Drawings

Bottom connection

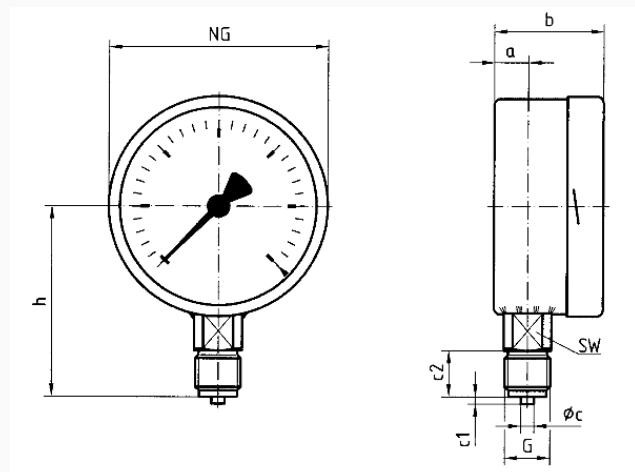

Dimensions (mm)

NG	a	b	Øc	c1	c2	G	h	SW
100	15,6	49	6	3	20	G½B	86	22
160	17,5	50	6	3	20	G½B	116	22

Versions

Range	Mounting type	Type		Part number
-1/+0 bar	direct	RF160Ch D402	●	85251402
-1/+0.6 bar	direct	RF160Ch D402	●	85252402
-1/+1.5 bar	direct	RF160Ch D402	●	85253402
-1/+3 bar	direct	RF160Ch D402	●	85254402
-1/+5 bar	direct	RF160Ch D402	●	85255402
-1/+9 bar	direct	RF160Ch D402	●	85256402
-1/+15 bar	direct	RF160Ch D402	●	85257402
0/0.6 bar	direct	RF160Ch D402	●	85259402
0/1 bar	direct	RF160Ch D402	●	85260402
0/1.6 bar	direct	RF160Ch D402	●	85261402
0/2.5 bar	direct	RF160Ch D402	●	85262402
0/4 bar	direct	RF160Ch D402	●	85263402
0/6 bar	direct	RF160Ch D402	●	85264402
0/10 bar	direct	RF160Ch D402	●	85265402
0/16 bar	direct	RF160Ch D402	●	85266402
0/25 bar	direct	RF160Ch D402	●	85267402
0/40 bar	direct	RF160Ch D402	●	85268402
0/60 bar	direct	RF160Ch D402	●	85269402

0/100 bar	direct	RF160Ch D402	●	85270402
0/160 bar	direct	RF160Ch D402	●	85271402
0/250 bar	direct	RF160Ch D402	●	85272402
0/400 bar	direct	RF160Ch D402	●	85273402
0/600 bar	direct	RF160Ch D402	●	85274402
0/1000 bar	direct	RF160Ch D402	●	85275402
0/1600 bar	direct	RF160Ch D402	●	85276402

● in-stock items

● Non-stock items