



Bourdon tube pressure gauges for industrial applications type D4

benefits

- for machine and plant engineering
- robust, stainless steel housing with bayonet bezel
- can be equipped with electrical contact
- DNV-GL- and GOSSTANDART-certified

Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys. For high accuracy and rough application conditions.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

Technical Specifications

Type

D4

Nominal size

100

accuracy class (EN 837-1/6)

1.0

ranges (EN 837-1/5)

see ordering table

application area

≤ 600 bar: Full scale value
 > 600 bar: $\frac{3}{4}$ x full scale value
 ≤ 600 bar: 0.9 x full scale value
 > 600 bar: $\frac{2}{3}$ x full scale value
 ≤ 600 bar: 1.3 x full scale value
 > 600 bar: Full scale value

Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$

falling temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$
 of full scale value

Degree of protection

IP 54 (EN 60529)

Connection

Brass, bottom back

Measuring element

Bourdon tube

≤ 60 bar: "C" type tube, Copper alloy

> 60 bar: helical tube, stainless steel 316 Ti/316 L

movement

Brass

Dial

Aluminium, white

Scaling: black

Pointer

Aluminium, black

Housing

Stainless steel 304, with blow-out

bayonet bezel

Stainless steel 304

window


Instrument glass

Options

- back flange
- Panel mounting bezel
- 3-hole fixing, panel mounting bezel
- laminated safety glass window
- throttle screw
- Reference pointer
- Electrical contacts
- special scales
- other process connections

Technical Drawings

bottom back connection

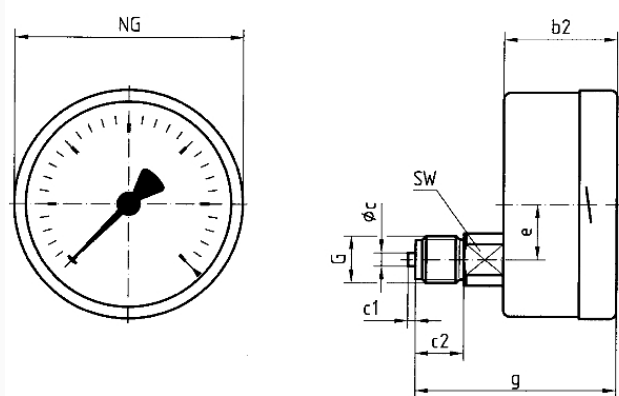

Dimensions (mm)

NG	b2	Øc	c1	c2	e	G	g	SW
100	49	6	3	20	26,5	G½B	81	22
160	50	6	3	20	26,5	G½B	82	22
250	-	6	3	20	-	G½B	-	22

Versions

Range	Mounting type	Type		Part number
-1/+0 bar	direct	RF100I D411	●	85301411
-1/+0.6 bar	direct	RF100I D411	●	85302411
-1/+1.5 bar	direct	RF100I D411	●	85303411
-1/+3 bar	direct	RF100I D411	●	85304411
-1/+5 bar	direct	RF100I D411	●	85305411
-1/+9 bar	direct	RF100I D411	●	85306411
-1/+15 bar	direct	RF100I D411	●	85307411
0/0.6 bar	direct	RF100I D411	●	85309411
0/1 bar	direct	RF100I D411	●	85310411
0/1.6 bar	direct	RF100I D411	●	85311411
0/2.5 bar	direct	RF100I D411	●	85312411
0/4 bar	direct	RF100I D411	●	85313411
0/6 bar	direct	RF100I D411	●	85314411
0/10 bar	direct	RF100I D411	●	85315411
0/16 bar	direct	RF100I D411	●	85316411
0/25 bar	direct	RF100I D411	●	85317411
0/40 bar	direct	RF100I D411	●	85318411
0/60 bar	direct	RF100I D411	●	85319411

0/100 bar	direct	RF100I D411	●	85320411
0/160 bar	direct	RF100I D411	●	85321411
0/250 bar	direct	RF100I D411	●	85322411
0/400 bar	direct	RF100I D411	●	85323411
0/600 bar	direct	RF100I D411	●	85324411
0/1000 bar	direct	RF100I D411	●	85325411

- in-stock items
- Non-stock items