



Bourdon tube pressure gauges for industrial applications type D4

benefits

- for machine and plant engineering
- robust, stainless steel housing with bayonet bezel
- can be equipped with electrical contact
- DNV-GL- and GOSSTANDART-certified

Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys. For high accuracy and rough application conditions.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

Technical Specifications

Type

D4

Nominal size

160

accuracy class (EN 837-1/6)

1.0

ranges (EN 837-1/5)

see ordering table

application area

- ≤ 600 bar: Full scale value
- > 600 bar: $\frac{3}{4}$ x full scale value
- ≤ 600 bar: 0.9 x full scale value
- > 600 bar: $\frac{2}{3}$ x full scale value
- ≤ 600 bar: 1.3 x full scale value
- > 600 bar: Full scale value

Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$

falling temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$
of full scale value

Degree of protection

IP 54 (EN 60529)

Connection

Brass, bottom

Measuring element

Bourdon tube

≤ 60 bar: "C" type tube, Copper alloy

> 60 bar: helical tube, stainless steel 316 Ti/316 L

movement

Brass

Dial

Aluminium, white

Scaling: black

Pointer

Aluminium, black

Housing

Stainless steel 304, with blow-out

bayonet bezel

Stainless steel 304

window


Instrument glass

Options

- back flange
- Panel mounting bezel
- 3-hole fixing, panel mounting bezel
- laminated safety glass window
- throttle screw
- Reference pointer
- Electrical contacts
- special scales
- other process connections

Technical Drawings

Bottom connection

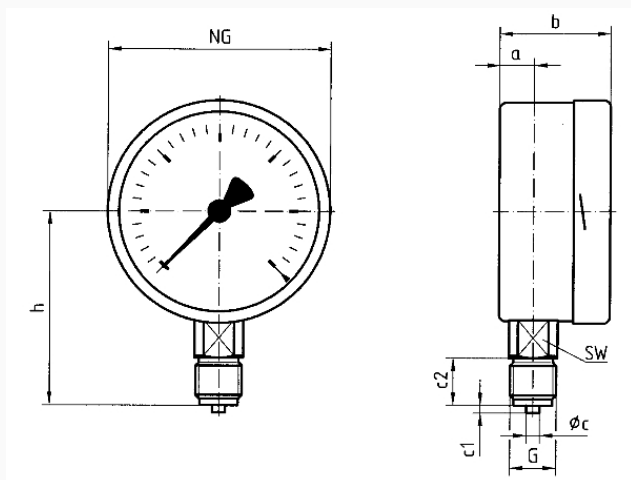

Dimensions (mm)

NG	a	b	Øc	c1	c2	G	h	SW
100	15,6	49	6	3	20	G½B	86	22
160	17,5	50	6	3	20	G½B	116	22
250	16	57	6	3	20	G½B	165	22

Versions

Range	Mounting type	Type		Part number
-1/+0 bar	direct	RF160I D401	●	85351401
-1/+0.6 bar	direct	RF160I D401	●	85352401
-1/+1.5 bar	direct	RF160I D401	●	85353401
-1/+3 bar	direct	RF160I D401	●	85354401
-1/+5 bar	direct	RF160I D401	●	85355401
-1/+9 bar	direct	RF160I D401	●	85356401
-1/+15 bar	direct	RF160I D401	●	85357401
0/0.6 bar	direct	RF160I D401	●	85359401
0/1 bar	direct	RF160I D401	●	85360401
0/1.6 bar	direct	RF160I D401	●	85361401
0/2.5 bar	direct	RF160I D401	●	85362401
0/4 bar	direct	RF160I D401	●	85363401
0/6 bar	direct	RF160I D401	●	85364401
0/10 bar	direct	RF160I D401	●	85365401
0/16 bar	direct	RF160I D401	●	85366401
0/25 bar	direct	RF160I D401	●	85367401
0/40 bar	direct	RF160I D401	●	85368401
0/60 bar	direct	RF160I D401	●	85369401

0/100 bar	direct	RF160I D401	●	85370401
0/160 bar	direct	RF160I D401	●	85371401
0/250 bar	direct	RF160I D401	●	85372401
0/400 bar	direct	RF160I D401	●	85373401
0/600 bar	direct	RF160I D401	●	85374401
0/1000 bar	direct	RF160I D401	●	85375401

● in-stock items

● Non-stock items