


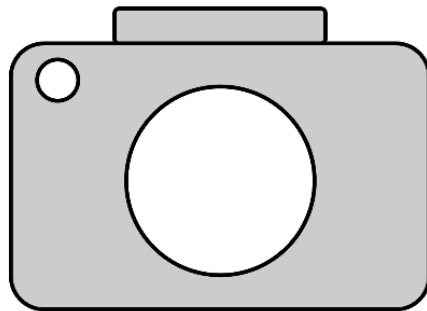

**Sorry, kein Bild
vorhanden**

Bourdon tube pressure gauge

housing $\varnothing$ (nominal size)	63 mm
Connection	1/4-18 NPT
alignment	bottom
accuracy class	1.6

benefits

- wetted parts specially cleaned, flushed and electropolished
- tightness-tested with helium
- rear blow-out
- versatile connection technology
- GOSSTANDART-certified

Technical Specifications

Type
D3

Nominal size
63

accuracy class (EN 837-1/6)
1.6

ranges (EN 837-1/5)
see ordering table

Calibration medium
Nitrogen or dried air

application area
static load: $\frac{3}{4}$ x full scale value
dynamic load: $\frac{2}{3}$ x full scale value
short-term: Full scale value

Contact type
Magnetic spring contact (MK) Single

Operating temperature range
Medium: max. 150 °C
Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
at rising temperature approx. ± 0.4 %/10 K
falling temperature approx. ± 0.4 %/10 K
of full scale value

Degree of protection
IP 32 (EN 60529)

Connection
stainless steel 316 Ti/316 L, bottom

Measuring element
Bourdon tube, stainless steel 316 Ti/316 L
 ≤ 60 bar: "C" type tube
> 60 bar: helical tube

wetted parts
cleaned,
flushed with nitrogen,
electropolished,
surface roughness $\leq R_a 0.6 \mu\text{m}$

movement
Stainless steel

Dial

Aluminium, white
Scaling: black
label: ultra-pure gas

Pointer

Aluminium, black

Housing

Stainless steel 304 back blow-out

push on bezel

Stainless steel 304, bare metal surface

window

Plastic

Magnetic spring contact (MK)**Supply voltage**

max. AC/DC 250 V

Making current and breaking current

max. 1 A

Continuous current

max. 0.6 A

Switch rating

max. 50/30 VA

Contact

Ag80 Ni20 Au 10 µm

Switching accuracy

approx. 2–5 % of full scale value

Operating temperature range

-20/+70 °C or corresponding to the respective measuring instruments


Adjustment range

5–95 % measuring range of gauge

Options

- surface roughness R_a 0.4 µm
- Housing polished
- Push on bezel polished
- Electrical contacts
- NG 50
- special scales
- other process connections

Technical Drawings

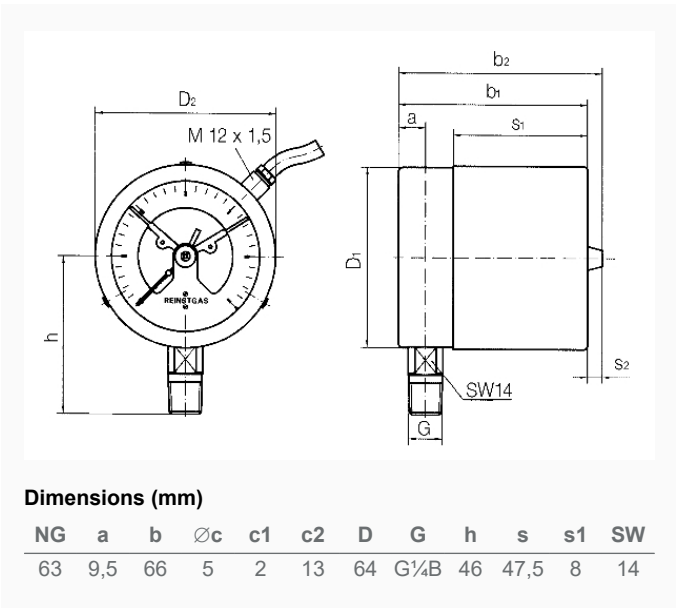

Versions

Range	Mounting type	Type		Part number
-1/+0.6 bar	direct	RF63RG MK1 D302	●	87352302
-1/+1.5 bar	direct	RF63RG MK1 D302	●	87353302
-1/+3 bar	direct	RF63RG MK1 D302	●	87354302
-1/+5 bar	direct	RF63RG MK1 D302	●	87355302
-1/+9 bar	direct	RF63RG MK1 D302	●	87356302
-1/+15 bar	direct	RF63RG MK1 D302	●	87357302
0/1.6 bar	direct	RF63RG MK1 D302	●	87361302
0/2.5 bar	direct	RF63RG MK1 D302	●	87362302
0/4 bar	direct	RF63RG MK1 D302	●	87363302
0/6 bar	direct	RF63RG MK1 D302	●	87364302
0/10 bar	direct	RF63RG MK1 D302	●	87365302
0/16 bar	direct	RF63RG MK1 D302	●	87366302
0/25 bar	direct	RF63RG MK1 D302	●	87367302
0/40 bar	direct	RF63RG MK1 D302	●	87368302
0/60 bar	direct	RF63RG MK1 D302	●	87369302
0/100 bar	direct	RF63RG MK1 D302	●	87370302
0/160 bar	direct	RF63RG MK1 D302	●	87371302
0/250 bar	direct	RF63RG MK1 D302	●	87372302
0/400 bar	direct	RF63RG MK1 D302	●	87373302

● in-stock items

● Non-stock items