



## Bourdon tube safety pressure gauges RF160SiGly

**Part no. 85502802**

**Bourdon tube safety pressure gauge type D8 with glycerine filling**

### benefits

- Safety housing S3 as per EN 837-1/9.7.2
- measuring system fully welded to housing
- tightness-tested with helium
- DNV- and GOSSTANDART-certified
- Ex version (optional)

### Application

For corrosive gaseous and liquid media which are not highly viscous and do not crystallise; suitable for corrosive environments. This gauge is designed for applications as per EN 837-1/9.7.2.

### Technical Specifications

#### Type

D8

#### Nominal size

160

#### accuracy class

EN 837-1/6

NG 160

1.0

#### ranges (EN 837-1/5)

see ordering table

#### standard version

#### Connection

Stainless steel 316 L, bottom

#### application area

≤ 600 bar: Full scale value

> 600 bar:  $\frac{3}{4}$  x full scale value

≤ 600 bar: 0.9 x full scale value

> 600 bar:  $\frac{2}{3}$  x full scale value

≤ 600 bar: 1.3 x full scale value

> 600 bar: Full scale value

#### Operating temperature range

Medium: max. 100 °C

Ambient: -20/+60 °C

#### Degree of protection

IP 54 (EN 60529)

#### Measuring element

Bourdon tube, Stainless steel 316 L

tightness-tested with helium

**movement**  
Stainless steel

**Dial**  
Aluminium, white  
Scaling: black

**Pointer**  
Aluminium, black


**Housing**  
Stainless steel 304, with solid baffle wall and blow-out (S3)

**bayonet bezel**  
Stainless steel 304

**window**  
Laminated safety glass

**filling liquid**  
glycerine (99.5 %)

Technical Drawings

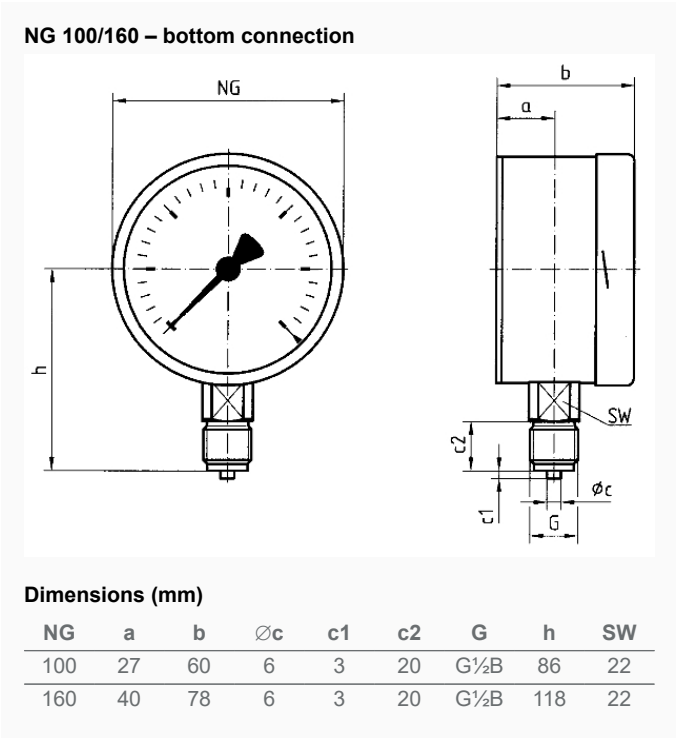

Versions

| Range       | Mounting type | Type               | Part number |
|-------------|---------------|--------------------|-------------|
| -1/+0.6 bar | direct        | RF160SiGly<br>D802 | 85502802    |

- in-stock items
- Non-stock items