


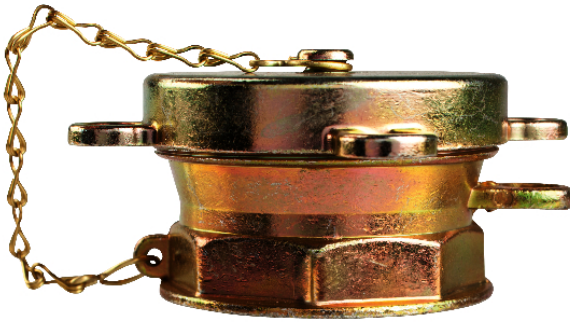

Cap for dipstick pipe G1 x G1¼

Part no. 20464

Caps for dipsticks, filler caps

benefits

- materials resistant to biofuel and biodiesel with max. 100 % FAME
- green fuels ready: suitable for use at tank facilities filled with the new paraffinic fuels HVO or GTL
- watertight up to 10 m water column - ideal for use in flood hazard areas

Application

For closing dip stick pipes and filling pipes of systems operated with fuel oil EL (DIN 51603-1), diesel fuel (EN 590), liquid fuels as per DIN SPEC 51603-6 and DIN/TS 51603-8 as well as biofuel or biodiesel with up to 100 % FAME (EN 14214). Also suitable for use with the new paraffinic fuels HVO or GTL as an admixture or 100%. Suitable for use in flood hazard areas and flood risk areas.

Description

Dip stick pipe cap/filler cap made of Zamak alloy. Watertight up to 10 m water column. Lockable with standard padlock.

Versions

Part no.

Cap for dipstick pipe
G1 x G1¼



20464

- ☒ in-stock items
- ☐ Non-stock items