



## Capsule pressure gauges for chemical applications KP160Ch

**Part no. 35166402**

**Capsule pressure gauge for chemical applications type D4**

### benefits

- with zero correction
- robust stainless steel housing (with bayonet bezel)
- wetted parts and movement made of stainless steel
- GOSSTANDART-certified
- Ex version (optional)

### Application

For corrosive gaseous and dry media, also for use in corrosive environments.

### Technical Specifications

**Type**  
D4

**Nominal size**  
160

**accuracy class (EN 837-3/6)**  
1.6

**ranges (EN 837-3/5)**  
see ordering table

**application area**  
static load: Full scale value  
dynamic load: 0.9 x full scale value  
overload safety: 1.3 x full scale value

### standard version

**Connection**  
stainless steel 316 Ti/316 L, bottom

### Operating temperature range

Medium: max. 100 °C  
Ambient: -20/+60 °C

### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:  
at rising temperature approx.  $\pm 0.6 \text{ } \%/10 \text{ K}$   
falling temperature approx.  $\pm 0.6 \text{ } \%/10 \text{ K}$   
of full scale value

### Degree of protection

IP 32 (EN 60529)

### Measuring element

Capsule element, stainless steel 316 Ti/316 L

**movement**  
Stainless steel

**Zero correction**  
from the front

**Seal**  
FKM (Viton)

**Dial**  
Aluminium, white  
Scaling: black

## Options

- back flange
- Panel mounting bezel
- 3-hole fixing, panel mounting bezel
- Ex version
- throttle screw
- special scales
- other process connections

**Pointer**  
Aluminium, black


**Housing**  
Stainless steel 304

**bayonet bezel**  
Stainless steel 304

**window**  
D402  
Laminated safety glass

## Technical Drawings

### Bottom connection

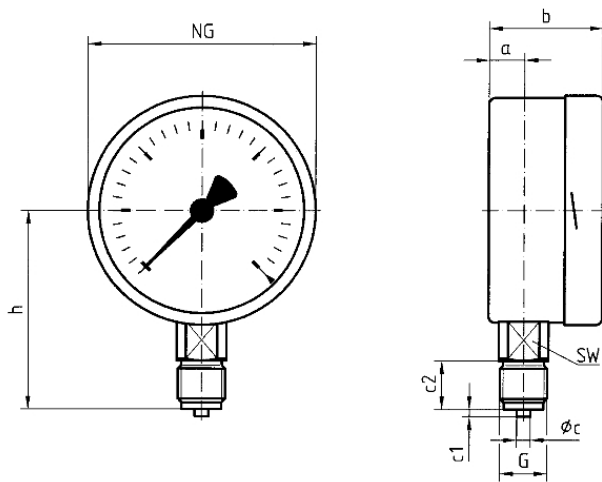

### Dimensions (mm)

| NG  | a    | b  | Øc | c1 | c2 | G   | h   | SW |
|-----|------|----|----|----|----|-----|-----|----|
| 63  | 10,8 | 40 | 5  | 2  | 13 | G¼B | 53  | 14 |
| 100 | 15,6 | 49 | 6  | 3  | 20 | G½B | 86  | 22 |
| 160 | 17,5 | 50 | 6  | 3  | 20 | G½B | 116 | 22 |

Versions

| Range     | Mounting type | Type            |                                                                                     | Part number |
|-----------|---------------|-----------------|-------------------------------------------------------------------------------------|-------------|
| 0/25 mbar | direct        | KP160Ch<br>D402 |  | 35166402    |

-  in-stock items
-  Non-stock items