


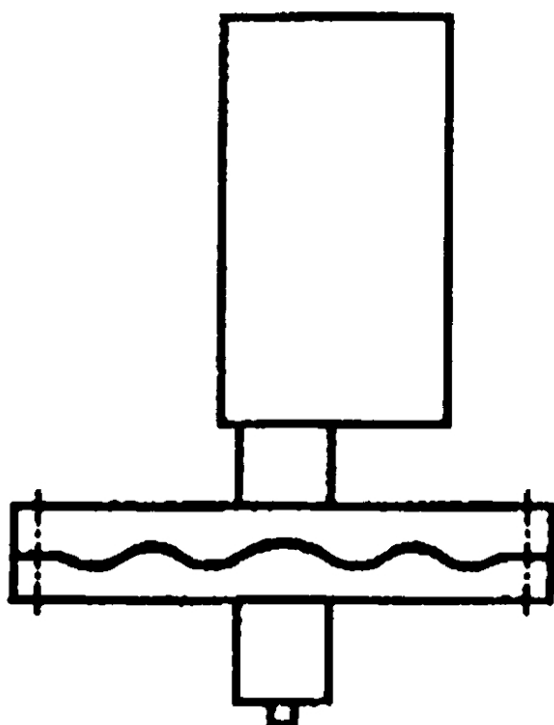

Diaphragm pressure gauges for chemical applications PF100ChGly

Part no. 85906802

Diaphragm pressure gauge for chemical applications
type D8 with glycerine filling

benefits

- for low pressure ranges
- high overload protection
- high resistance
- optional flange connections

Technical Specifications

Type
D8

Nominal size
100

accuracy class (EN 837-3/6)
1.6

ranges (EN 837-3/5)
see ordering table

application area
static load: Full scale value
dynamic load: 0.9 x full scale value

standard version

Connection
stainless steel 316 Ti/316 L, bottom
G½B, SW22 (EN 837-3/7.3)

lower measuring flange
stainless steel 316 Ti/316 L

Overpressure safety
≤ 6 bar
at least 5 x FS

Operating temperature range
Medium: max. 100 °C
Ambient: -20/+60 °C

Temperature performance
Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
at rising temperature approx. ± 0.8 %/10 K
falling temperature approx. ± 0.8 %/10 K
of full scale value

Degree of protection
IP 54 (EN 60529)

upper measuring flange
Stainless steel 304

Measuring element

diaphragm
measuring flange $\varnothing$ 160
stainless steel 316 Ti/316 L

Seal

FPM (Viton)

movement

Stainless steel

Dial

Aluminium, white
Scaling: black

Pointer

Aluminium, black

Housing

Stainless steel 304, with blow-out

bayonet bezel

Stainless steel 304

window

Laminated safety glass

filling liquid


Glycerine

Options

- Safety housing
- Overpressure safety 10 x FSD (measuring flange $\varnothing$ 100 to max. 40 bar, measuring flange $\varnothing$ 160 to max. 2.5 bar)
- Glycerine filling ($\geq$ 40 mbar, $\leq$ 250 mbar accuracy class 2.5)
- Electrical contacts
- wetted parts with special coating
- open connection flanges as per EN/ASME

Technical Drawings

bottom connection, measuring flange $\varnothing$ 100

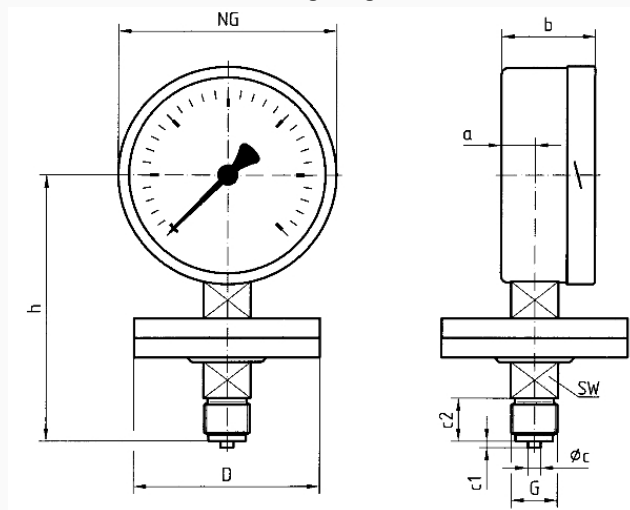

Dimensions (mm)

NG	a	b	$\varnothing c$	c1	c2	D	G	h	SW
100	20	55	6	3	20	100	G $\frac{1}{2}$ B	127	22

Versions

Range	Mounting type	Type		Part number
0/100 mbar	direct	PF100ChGly D802		85906802

-  in-stock items
-  Non-stock items