



## Digital pressure gauges DIM 30

Part no. 33406R118021

Precision digital pressure gauges

### benefits

- accuracy  $\leq \pm 0.05\%$  at 400 mbar and higher
- suitable for on-site calibration or pressure transducers
- graphical LC display
- Data logger function

### Application

For mobile electronic pressure measurement with high demands in terms of accuracy and long-term stability in process engineering as well as mechanical and plant engineering applications. Suitable for monitoring pressure and temperature behaviour as well as on-site calibration of pressure transducers.

### Description

The battery-operated digital pressure gauge DIM 30 consists of two devices – the digital display with a graphical LC display and a pressure transducer with a piezo-resistive stainless steel sensor. The pressure transducer can be replaced without tools and without calibration for other measurement tasks. The integrated data logger can record pressure and temperature values linearly and cyclically. These measured values can be analysed with the enclosed PC evaluation software.

### Technical Specifications

#### Display

backlit graphical LC display,  
visible area 55 x 46 mm,  
Indication of measured values max. 7 digits,  
temperature indication,  
Time,  
100-segment bar chart potential input value,  
user interface language selectable (German/English),  
Duration and intensity of backlight adjustable

#### Indication of measured values

bar, mbar, hPa, kPa, MPa, psi, inHg, cmHg, mmHg, inH<sub>2</sub>O, mmH<sub>2</sub>O,  
mH<sub>2</sub>O, or kg/cm<sup>2</sup>  
selectable pressure unit

#### temperature indication

Measuring range: -10/+55 °C  
Resolution: 0.1 °C  
Accuracy:  $\pm 2$  K

#### Data logger

stores pressure values and sensor temperature (sec., min., hour, daily at an adjusted time)  
max. 600,000 values  
Adjustable measurement interval

#### Zero correction

from the front via keypad

#### Measuring accuracy

Deviation from the characteristic curve according to IEC 60770 – limit point calibration (non-linearity, hysteresis, repeatability)  
≥ 0/0.4 bar  
≤ ± 0.05 % FSO (BFSL)

#### Long-term stability

≤ ± 0.1 % FSO/year

#### Measuring range

0/60 bar

#### Overpressure safety

at least 3 x FS

#### Burst pressure

at least 5 x FS

#### Operating temperature range

Medium: -10/+55 °C  
Ambient: -10/+55 °C  
Storage: -20/+70 °C

#### Housing diameter

100 mm

#### Process connection

G $\frac{1}{2}$ B (EN 837-1)

### Options

- other process connections
- without seal (weld version only for process connections as per EN 837)

#### material

Housing: Stainless steel 304  
Process connection: Stainless steel 304  
diaphragm: Stainless steel 316 L  
Seal: FKM (Viton)

#### wetted parts

Process connection, diaphragm, Seal

#### Mounting position

any

#### Supply voltage

3 x 1.5 V AA batteries  
standard mode: > 2000 hours  
standby mode: > 5 Jahre

#### Current input

without backlight: ca. 1.3 mA  
with backlight: ca. 16 mA  
depends on adjusted intensity  
standby mode: ca. 1.2 µA

#### Degree of protection

IP 67 (EN 60529)

#### CE conformity

EMC Directive 2014/30/EU  
RoHS Directive 2011/65/EU  
Pressure Equipment Directive 2014/68/EU (module A)

#### Scope of delivery


- Precision digital pressure gauge DIM 30
- batteries
- PC connection cables
- Evaluation software on CD-ROM

#### Options

- other process connections
- without seal (weld version only for process connections as per EN 837)

## Technical Drawings

digital pressure gauge DIM 30

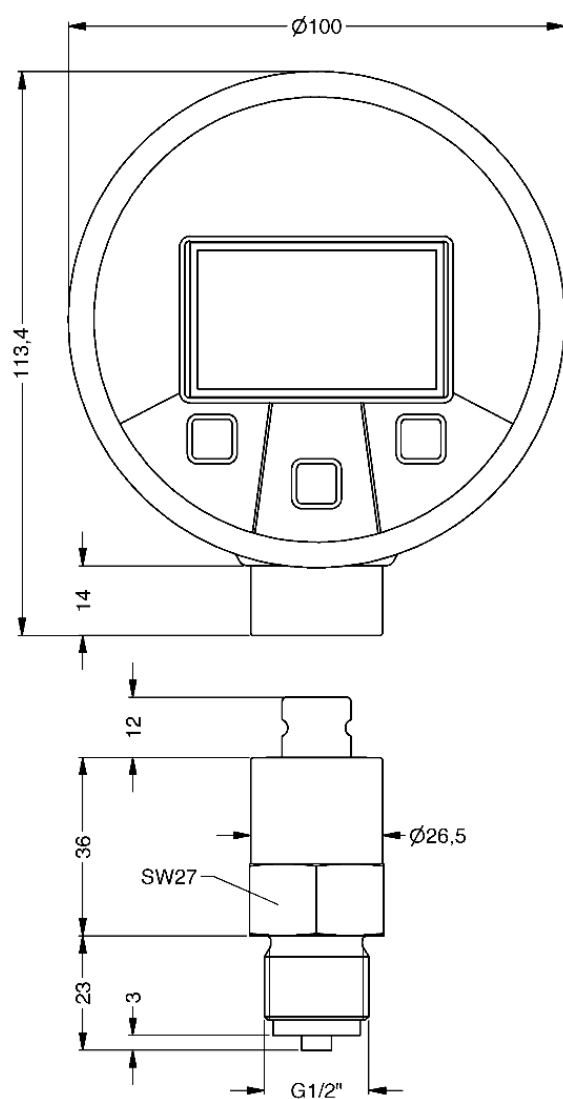

Dimensions (mm)

Versions

|                                      | Process connec-<br>tion | pressure range | Overload        | Burst pressure  |                                                                                     | Part no.     |
|--------------------------------------|-------------------------|----------------|-----------------|-----------------|-------------------------------------------------------------------------------------|--------------|
| Digital pressure<br>gauges<br>DIM 30 |                         | 0/60 bar       | at least 3 x FS | at least 5 x FS |  | 33406R118021 |

-  in-stock items
-  Non-stock items