


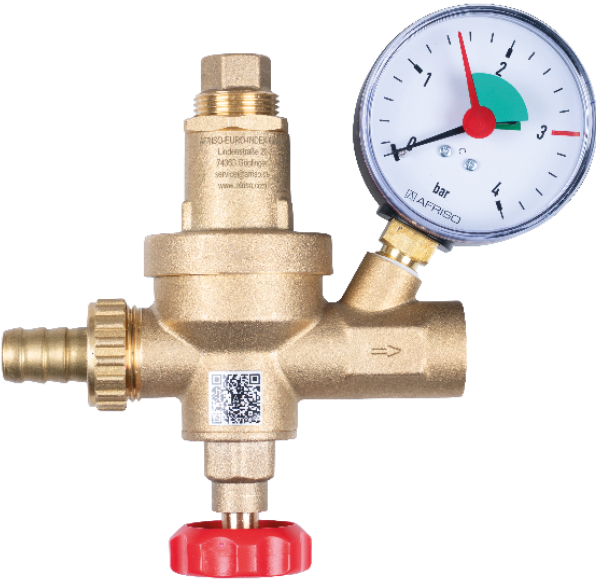

filling fitting

benefits

- combination fitting with pressure reducer, stop valve and backflow preventer
- version FAM with pressure gauge for direct indication of the system pressure

Application

For sealed heating systems as per EN 12828.

Description

Filling fitting with housing and spring cap made of brass. Inlet for hose inside diameter 12 mm, outlet G½ female thread. With G¼ connection for pressure gauge for heating installations. With pressure reducer, stop valve and backflow preventer. Inlet pressure 6 up to 10 bar, outlet pressure adjustable between 0.5 and 3 bar. Version FAM with pressure gauge for heating installations Ø 63 mm, 0/4 bar, G¼ bottom.

Versions

		Part no.
filling fitting FA	●	42405
filling fitting FAM	●	42406

- in-stock items
- Non-stock items