



ball valve KH 01 H DFVFM G³/₄ female

Part no. 40955

Ball valve with filter and magnet

benefits

- Shut-off element for universal use with heating systems
- Integrated filter sieve and magnet as dirt collector
- Easy cleaning
- nickel-plated housing



Application

Ideal for all applications in heating systems that require an additional filter function against lime, rust, sludge or other contaminants is required. The installation of shut-off elements in heating systems is essential for subsequent maintenance.

Description

Nickel-plated ball valve as shut-off element with integrated filter sieve and strong magnets. You can clean the unit without unpressurising and draining the system. For cleaning, the ball valve is simply closed and the filter sieve and magnet are cleaned by removing the cap on the underside.

Technical Specifications

Connection

G³/₄ female

Housing

Brass, nickel-plated

Filter

material: Stainless steel

Mesh size: 0.6 mm

Operating pressure

16 bar (PN 16)

Operating temperature range

-20/+90 °C (short-term 120 °C)

Magnet

1.2 T

Mounting position

preferably vertical

Kvs

Part no.: 40955

2.8 m³/h

Options


- other nominal sizes
- other handle (colour/shape)
- other connection threads

Options

- other nominal sizes
- other handle (colour/shape)
- other connection threads

Technical Drawings

Ball valve G $\frac{3}{4}$ female thread with filter/magnet

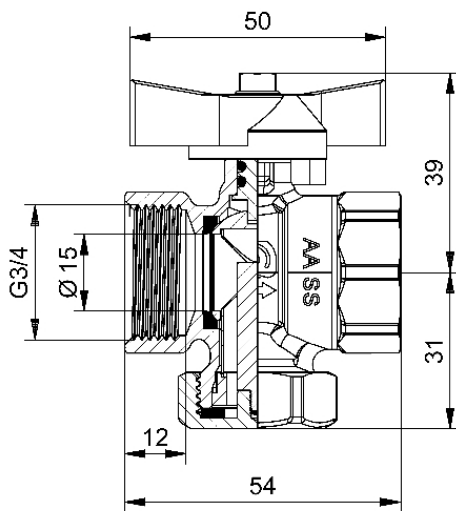

Dimensions (mm)

Versions

Part no.

ball valve
KH 01 H DFVFM
G $\frac{3}{4}$ female

with filter and magnet, nickel-plated



40955

- in-stock items
- Non-stock items