



## Bourdon tube pressure gauge RF100 rad

**Part no. 63611**

**Bourdon tube pressure gauges for heating/plumbing applications**

### benefits

- with self-sealing connection thread (NG 50 and 63) for fast mounting
- corrosion-resistant housing

### Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys and EPDM.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

### Technical Specifications

#### Nominal size

100

#### accuracy class (EN 837-1/6)

2.5

#### ranges

0/2.5 bar

#### application area

static load:  $\frac{3}{4}$  x full scale value

dynamic load:  $\frac{3}{4}$  x full scale value

short-term: Full scale value

#### Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

#### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx.  $\pm 0.4$  %/10 K

falling temperature approx.  $\pm 0.4$  %/10 K

of full scale value

#### Degree of protection

IP 32 (EN 60529)

### standard version

#### Connection

Brass, bottom

NG 100

G $\frac{1}{2}$ B

#### Measuring element

Bourdon tube, "C" type tube

Copper alloy

**movement**  
Brass


**Dial**  
Plastic, white  
Scaling: black

**Pointer**  
Plastic, black

**Housing**  
Plastic (ABS), black, highly impact-resistant and corrosion-resistant

**window**  
Plastic, clipped in  
NG 100  
with adjustable red reference pointer

Technical Drawings

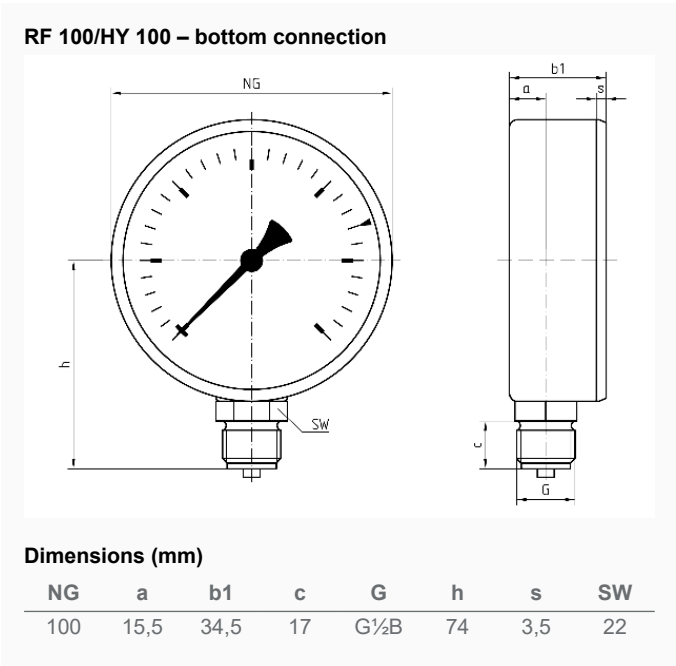

Versions

|       | housing ø | Conne-<br>ction | Conne-<br>ction | Thread | alignment | Range     | Type         | Part no. |
|-------|-----------|-----------------|-----------------|--------|-----------|-----------|--------------|----------|
| RF100 | 100 mm    | G½B             |                 |        | bottom    | 0/2.5 bar | RF100<br>rad | 63611    |

- in-stock items
- Non-stock items