



## Bourdon tube pressure gauge RF50GT

**Part no. 85068302GT**

**Standard Bourdon tube pressure gauge for gas applications type D3**

### benefits

- Version safety pressure gauge S2 as per EN 837-1
- dual scale for measurement of different media (option)
- rear blow-out
- many customised versions available

### Application

For gaseous and liquid media which are not highly viscous and do not crystallise. Specially designed for gas technology devices, fittings and installations.

! For measuring gas or vapour, these gauges must be used in accordance with the table "Selection Criteria as per EN 837-2" (see appendix)!

### Technical Specifications

#### Type

D3

#### Nominal size

50

#### Version

EN 837-1-S2

#### accuracy class (EN 837-1/6)

1.6

#### ranges (EN 837-1/5)

see ordering table

#### application area

static load:  $\frac{1}{4}$  x full scale value

dynamic load:  $\frac{2}{3}$  x full scale value

short-term: Full scale value

#### Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

#### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx.  $\pm 0.4$  %/10 K

falling temperature approx.  $\pm 0.4$  %/10 K

of full scale value

#### Degree of protection

IP 32 (EN 60529)

## standard version

### Connection

D302  
stainless steel 316 Ti/316 L  
bottom

### Measuring element

Bourdon tube  
D302  
stainless steel 316 Ti/316 L  
≤ 40 bar: "C" type tube  
> 40 bar: helical tube

### movement

Brass

### Dial

Aluminium, white  
Scaling: black

### Pointer

Aluminium, black

### Housing

Stainless steel 304, with rear blow-out

### window


Plastic, snapped in

## Options

- wetted parts stainless steel
- wetted parts oil-free and grease-free
- Helium leak test
- throttle screw
- special scales
- other connection threads

## Technical Drawings

### Bottom connection

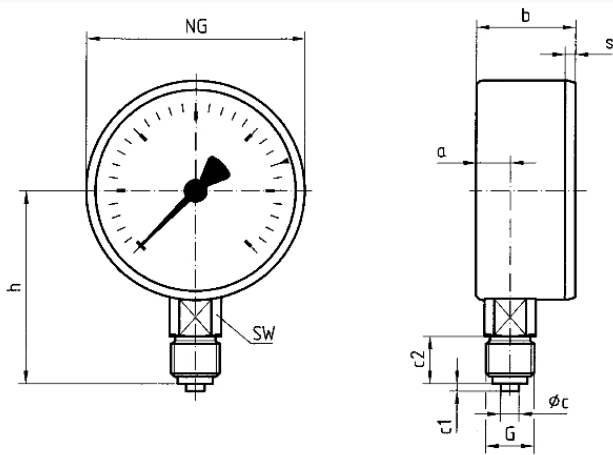

### Dimensions (mm)

| NG | a    | b    | Øc | c1 | c2 | G   | h  | s   | SW |
|----|------|------|----|----|----|-----|----|-----|----|
| 40 | 8,2  | 23,5 | 4  | 2  | 10 | G½B | 36 | 3   | 12 |
| 50 | 10,5 | 29   | 5  | 2  | 13 | G¾B | 46 | 3,8 | 14 |
| 63 | 11   | 29,5 | 5  | 2  | 13 | G¾B | 53 | 3,7 | 14 |

Versions

| Range    | Mounting type | Type           |                                                                                     | Part number |
|----------|---------------|----------------|-------------------------------------------------------------------------------------|-------------|
| 0/40 bar | direct        | RF50GT<br>D302 |  | 85068302GT  |

-  in-stock items
-  Non-stock items