



## Glycerine filled Bourdon tube pressure gauges RF63Gly

Part no. 85113711

Glycerine filled Bourdon tube pressure gauge type D7

### benefits

- robust stainless steel housing
- can be used in case of heavy vibrations and high, dynamic pressure loads
- longer service life due to less wear and corrosion protection of the measuring system
- No steaming up of the inside of the window in case of outdoor applications

### Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys. For measurements in areas with high vibration levels and high, dynamic pressure loads.

### Technical Specifications

**Type**  
D7

**Nominal size**  
63

**accuracy class (EN 837-1/6)**  
1.6

**ranges (EN 837-1/5)**  
see ordering table

#### standard version

**Connection**  
Brass, centre back

**Measuring element**  
Bourdon tube  
≤ 60 bar: "C" type tube  
> 60 bar: helical tube

**movement**  
Brass

#### application area

static load:  $\frac{3}{4}$  x full scale value  
dynamic load:  $\frac{2}{3}$  x full scale value  
short-term: Full scale value

#### Operating temperature range

Medium: max. 60 °C  
Ambient: -20/+60 °C

#### Degree of protection

IP 54 (EN 60529) with housing vent (≤ 25 bar)

#### Dial

Aluminium, white  
RF63Gly  
dual scale, bar outer, black – psi inner, red

#### Pointer

Aluminium, black

#### Housing

Stainless steel 304, with blow-out

**crimped bezel**  
Stainless steel 304

**window**  
Plastic


## Options

- Filling liquid silicone oil
- Back flange (NG 63/80/100)
- clamp fixing
- 3-hole fixing, panel mounting bezel
- crimped bezel polished
- measuring system stainless steel (up to 1,000 bar, NG 80/100)
- special scales
- Clip reference pointer, red, adjustable (NG 63)
- throttle screw
- other process connections

**filling liquid**  
glycerine (99.5 %)

## Technical Drawings

NG 50/63 – centre back connection

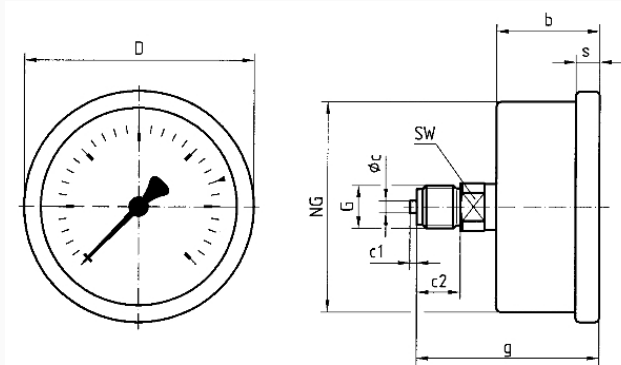

Dimensions (mm)

| NG | b    | Øc | c1 | c2 | D  | G   | g    | s   | SW |
|----|------|----|----|----|----|-----|------|-----|----|
| 50 | 28   | 5  | 2  | 13 | 53 | G¼B | 51   | 4,5 | 14 |
| 63 | 30,5 | 5  | 2  | 13 | 68 | G¼B | 53,3 | 7   | 14 |

## Versions

| Range   | Mounting type | Type            | Part number |
|---------|---------------|-----------------|-------------|
| 0/4 bar | direct        | RF63Gly<br>D711 | 85113711    |

- in-stock items
- Non-stock items