


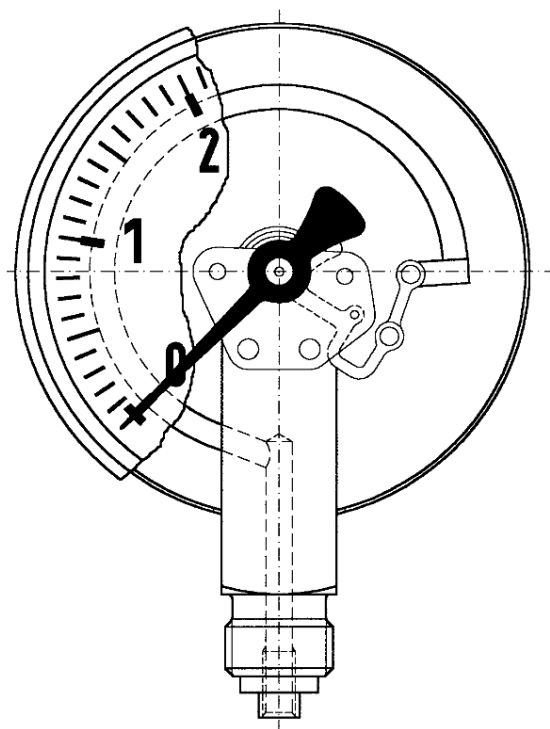

Glycerine filled Bourdon tube pressure gauges RF63Gly

Part no. 85111641

Glycerine filled Bourdon tube pressure gauge type D6

benefits

- can be used in case of heavy vibrations and high, dynamic pressure loads
- longer service life due to less wear and corrosion protection of the measuring system
- No steaming up of the inside of the window in case of outdoor applications

Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys. For measurements in areas with high vibration levels and high, dynamic pressure loads.

Technical Specifications

Type
D6

Nominal size
63

accuracy class (EN 837-1/6)
1.6

ranges (EN 837-1/5)
see ordering table

standard version

Connection
Brass, centre back

application area

static load: $\frac{3}{4}$ x full scale value
dynamic load: $\frac{2}{3}$ x full scale value
short-term: Full scale value

Operating temperature range

Medium: max. 60 °C
Ambient: -20/+60 °C

Degree of protection

IP 54 (EN 60529) with housing vent (≤ 25 bar)

Measuring element

Bourdon tube, Copper alloy
 ≤ 60 bar: "C" type tube
> 60 bar: helical tube

movement

Brass

Dial

NG 63

Aluminium, white

Scaling: black

Pointer

NG 63

Aluminium, black

Housing

NG 63

Polyamide, black
with blow-out

crimped bezel

NG 63

Aluminium, black

window

NG 63

Plastic

filling liquid


glycerine (99.5 %)

Options

- Back flange (NG 63)
- clamp fixing (NG 50/63)
- 3-hole fixing, panel mounting bezel (NG 63)
- throttle screw
- special scales
- other process connections

Technical Drawings

Centre back connection, with clamp fixing

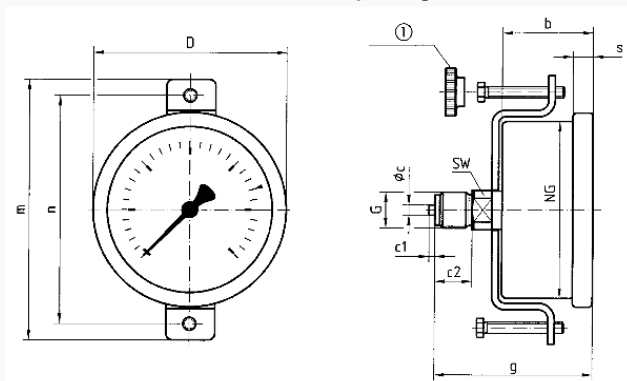

Dimensions (mm)

NG	b	Øc	c1	c2	D	G	g	m	n	s	SW
50	31,5	5	2	13	53	G $\frac{1}{4}$ B	54,5	82	73	5	14
63	32	5	2	13	68	G $\frac{1}{4}$ B	55	94	82	7	14

Versions

Range	Mounting type	Type		Part number
0/1.6 bar	clamp fixing	RF63Gly D641		85111641

-  in-stock items
-  Non-stock items