



Glycerine filled Bourdon tube pressure gauge type D7

housing $\varnothing$ (nominal size)	63 mm
Connection	G $\frac{1}{4}$ B
alignment	centre back
accuracy class	1.6
standard	EN 837-1

benefits

- robust stainless steel housing
- can be used in case of heavy vibrations and high, dynamic pressure loads
- longer service life due to less wear and corrosion protection of the measuring system
- No steaming up of the inside of the window in case of outdoor applications

Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys. For measurements in areas with high vibration levels and high, dynamic pressure loads.

Technical Specifications

Type

D7

Nominal size

63

accuracy class (EN 837-1/6)

1.6

ranges (EN 837-1/5)

see ordering table

application area

static load: $\frac{3}{4}$ x full scale value
dynamic load: $\frac{2}{3}$ x full scale value
short-term: Full scale value

Operating temperature range

Medium: max. 60 °C
Ambient: -20/+60 °C

Connection

Brass, centre back

Measuring element

Bourdon tube
 ≤ 60 bar: "C" type tube
> 60 bar: helical tube

movement

Brass

Dial

Aluminium, white
RF63Gly
dual scale, bar outer, black – psi inner, red

Pointer

Aluminium, black

Housing

Stainless steel 304, with blow-out

crimped bezel

Stainless steel 304

window

Plastic

filling liquid


glycerine (99.5 %)

Options

- Filling liquid silicone oil
- Back flange (NG 63/80/100)
- clamp fixing
- 3-hole fixing, panel mounting bezel
- crimped bezel polished
- measuring system stainless steel (up to 1,000 bar, NG 80/100)
- special scales
- Clip reference pointer, red, adjustable (NG 63)
- throttle screw
- other process connections

Technical Drawings

NG 50/63 – centre back connection, with clamp fixing

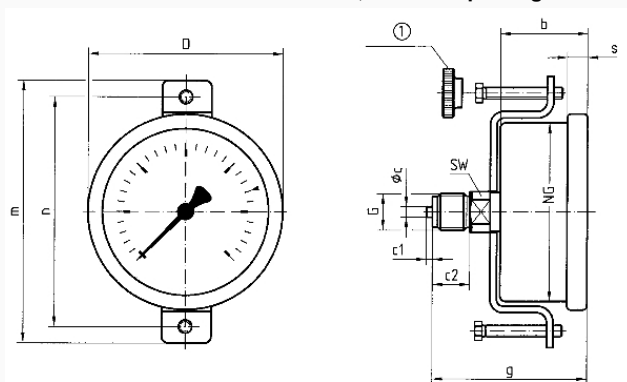

Dimensions (mm)

NG	b	Øc	c1	c2	D	G	g	m	n	s	SW
50	28	5	2	13	53	G $\frac{1}{4}$ B	51	82	73	4,5	14
63	30,5	5	2	13	68	G $\frac{1}{4}$ B	53,3	94	82	7	14

Versions

Range	Mounting type	Type		Part number
-1/+0 bar	clamp fixing	RF63Gly D751	●	85101751
-1/+0.6 bar	clamp fixing	RF63Gly D751	●	85102751
-1/+1.5 bar	clamp fixing	RF63Gly D751	●	85103751
-1/+3 bar	clamp fixing	RF63Gly D751	●	85104751
-1/+5 bar	clamp fixing	RF63Gly D751	●	85105751
-1/+9 bar	clamp fixing	RF63Gly D751	●	85106751
-1/+15 bar	clamp fixing	RF63Gly D751	●	85107751
0/0.6 bar	clamp fixing	RF63Gly D751	●	85109751
0/1 bar	clamp fixing	RF63Gly D751	●	85110751
0/1.6 bar	clamp fixing	RF63Gly D751	●	85111751
0/2.5 bar	clamp fixing	RF63Gly D751	●	85112751
0/4 bar	clamp fixing	RF63Gly D751	●	85113751
0/6 bar	clamp fixing	RF63Gly D751	●	85114751
0/10 bar	clamp fixing	RF63Gly D751	●	85115751
0/16 bar	clamp fixing	RF63Gly D751	●	85116751
0/25 bar	clamp fixing	RF63Gly D751	●	85117751
0/40 bar	clamp fixing	RF63Gly D751	●	85118751
0/60 bar	clamp fixing	RF63Gly D751	●	85119751
0/100 bar	clamp fixing	RF63Gly D751	●	85120751
0/160 bar	clamp fixing	RF63Gly D751	●	85121751
			●	
Industrial technology / Mechanical pressure measuring instruments / RF63Gly D751				3 / 3
0/315 bar	clamp fixing	RF63Gly D751	●	86818751