



## Pressure gauge push-button stop cock

Part no. 63191

### Application

Shut-off element between measuring line and pressure gauge. Normally, the push-button stop cock is closed. In this state, there is no pressure applied to the pressure gauge. Push the button to apply pressure to the pressure gauge and to display the operating pressure. With connection as per DIN EN 10226-1 suitable for gases as per DVGW G260 and SVGW.

### Technical Specifications

#### Test

DVGW- and SVGW-tested, with EU Type Examination Certificate, product ID number CE-0085AQ0985 for the version with connection as per DIN EN 10226-1.

#### Operating temperature range

Medium: 0/70 °C  
Ambient: -20/+60 °C

#### Connection

female x female  
Rp $\frac{1}{4}$  EN 10226


#### Nominal pressure

5 bar (MOP 5)

#### Housing

Brass, nickel-plated

Technical Drawings

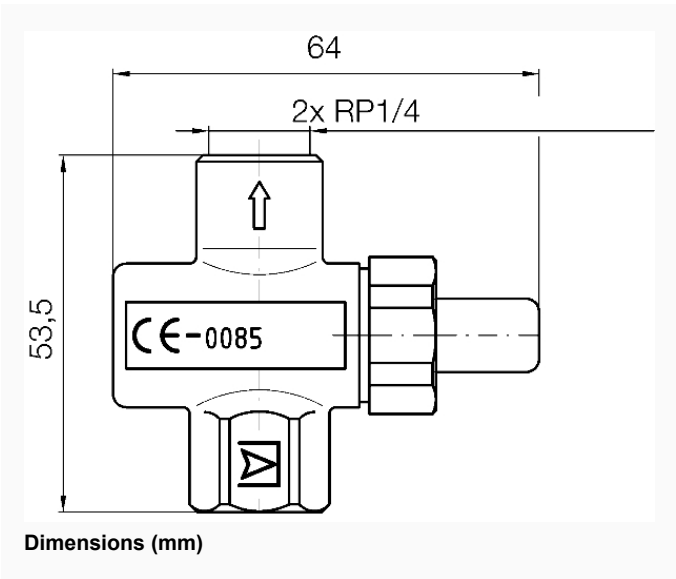

Versions

| Type                                                 | Connection | Connection | Nominal pressure | material             | Test                  | Part no. |
|------------------------------------------------------|------------|------------|------------------|----------------------|-----------------------|----------|
| Pressure gauge push-button stop cock female x female | Rp1/4      | EN 10226   | MOP 5            | Brass, nickel-plated | DVGW- and SVGW-tested | 63191    |

-  in-stock items
-  Non-stock items