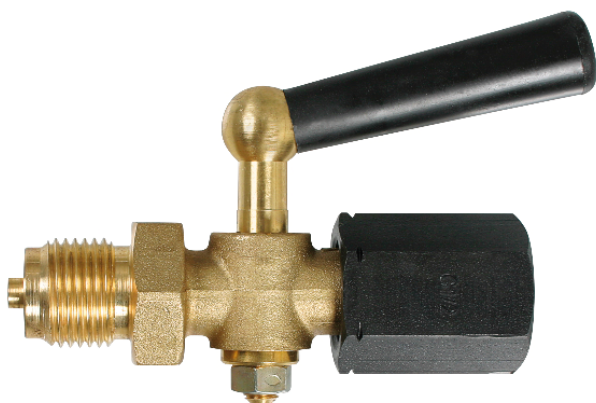


**pressure gauge shut-off cock****Application**

Shut-off element between pipe and pressure gauge. Stop cocks with test port allow you to connect both pressure gauges and testers to the pipe. Suitable for liquids, gases and vapour.

**Technical Specifications**

**Operating temperature range**  
Medium: -10/+50 °C

**Connection**  
see ordering table

## Versions

| Type                                                            | Connection      | Nominal pressure | material                                   | Version                                                                  | Part no. |
|-----------------------------------------------------------------|-----------------|------------------|--------------------------------------------|--------------------------------------------------------------------------|----------|
| pressure gauge shut-off cock<br>female/female connection x male | G $\frac{1}{4}$ | PN 6             | Brass, bare metal surface                  | female/female connection x male                                          | 63014    |
| pressure gauge shut-off cock<br>female/female connection x male | G $\frac{1}{2}$ | PN 16            | Brass, bare metal surface                  | female/female connection x male                                          | 63027    |
| pressure gauge shut-off cock<br>female/female connection x male | G $\frac{1}{2}$ | PN 16            | Stainless steel 316 Ti, bare metal surface | female/female connection x male                                          | 63090    |
| pressure gauge shut-off cock<br>female/female connection x male | G $\frac{1}{2}$ | PN 16            | Brass, bare metal surface                  | female/female connection x male<br>, with test flange 60 x 25 x 10       | 63028    |
| pressure gauge shut-off cock<br>female/female connection x male | G $\frac{1}{2}$ | PN 16            | Stainless steel 316 Ti, bare metal surface | female/female connection x male<br>, with test flange 60 x 25 x 10       | 63091    |
| pressure gauge shut-off cock<br>female/female connection x male | G $\frac{1}{2}$ | PN 16            | Brass, bare metal surface                  | female/female connection x male<br>, with male test connection M20 x 1.5 | 63015    |
| pressure gauge shut-off cock<br>female/female connection x male | G $\frac{1}{2}$ | PN 16            | Stainless steel 316 Ti, bare metal surface | female/female connection x male<br>, with male test connection M20 x 1.5 | 63016    |

● in-stock items

● Non-stock items