


pressure gauge shut-off cock

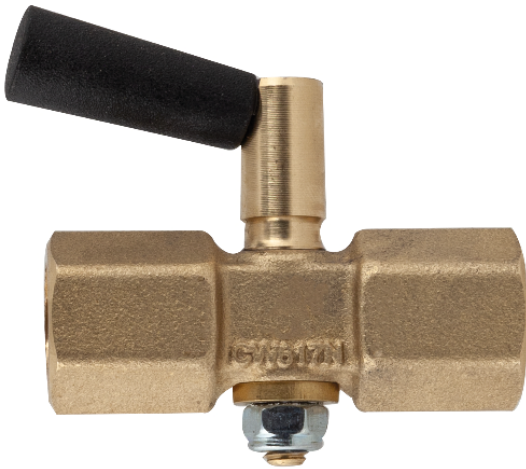

Application

Shut-off element between pipe and pressure gauge. Stop cocks with test port allow you to connect both pressure gauges and testers to the pipe. Suitable for liquids, gases and vapour.

Technical Specifications

Operating temperature range

Medium: -10/+50 °C

Connection

see ordering table

Versions

Type	Connection	Nominal pressure	material	Version	Part no.
pressure gauge shut-off cock female x female	G $\frac{1}{4}$	PN 6	Brass, bare metal surface	female x female	63001
pressure gauge shut-off cock female x female	G $\frac{3}{8}$	PN 16	Brass, bare metal surface	female x female	63002
pressure gauge shut-off cock female x female	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	female x female	63003
pressure gauge shut-off cock female x female	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	female x female , with round test flange 40 x 5	63004
pressure gauge shut-off cock female x female	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	female x female , with test flange 60 x 25 x 10	63005
pressure gauge shut-off cock female x female	G $\frac{1}{2}$	PN 16	Brass, bare metal surface	female x female , with sealing gland	63006

● in-stock items

● Non-stock items