



Pressure transducer standard version

benefits

- proven ceramic technology
- no mechanical ageing of the measuring cell
- no transmission liquid
- Versions for relative pressure and absolute pressure
- small temperature error

Application

For electronic pressure measurement in industrial applications (such as hydraulic and pneumatic applications as well as mechanical and plant engineering).

Description

Pressure transducers convert physical pressure into an electrical signal proportional to the pressure. DMU 01 is equipped with a piezo-resistive thick-film ceramic measuring cell.

Technical Specifications

Measuring accuracy

Deviation from the characteristic curve according to IEC 60770 – limit point calibration (non-linearity, hysteresis, repeatability)

Measuring range

see ordering table

Operating temperature range

Medium: -25/+125 °C

Ambient: -25/+85 °C

Storage: -40/+85 °C

Temperature error band

$\leq \pm 0.3 \% \text{ FSO}/10 \text{ K}$ In compensated range -25/+85 °C

dynamic characteristics

Response time: $\leq 10 \text{ ms}$

Process connection

G $\frac{1}{2}$ B DIN 3852 type E with protruding diaphragm

material

Housing: Stainless steel 304

pressure connection: Stainless steel 304

diaphragm: ceramic (Al_2O_3 96 %)

Seal: FKM (Viton)

Supply voltage

DC 8 – 32 V

Output signal

2-wire, 4–20 mA

Load

$$R_{\max} = [(UB - UB_{\min}) / 0.02 \text{ A}] \Omega$$

Current input

< 25 mA

electrical protection

short circuit proof and protected against reverse polarity

Electrical connection

Connector and junction box as per ISO 4400 (DIN 43650-A, EN 175301-803)

Degree of protection

IP 65 (EN 60529)

CE conformity

EMC Directive 2014/30/EU

RoHS Directive 2011/65/EU


Pressure Equipment Directive 2014/68/EU

Options

- other connection threads
- fixed cable connection
- other output signals
- SIL 2 (IEC 61508/61511) 2-wire, for DMU 01 VM

Technical Drawings

DMU 01 VM with connection G $\frac{1}{2}$ B DIN 3852 type E with protruding diaphragm

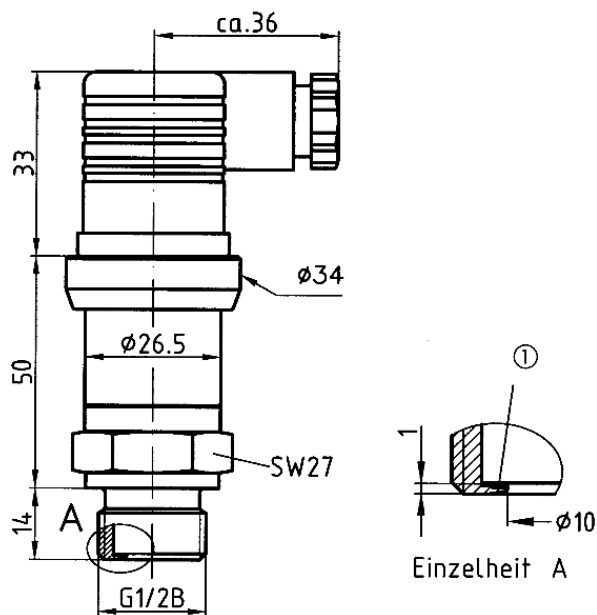

Dimensions (mm)

Flat gasket FKM (Viton)

Versions

Range	Measuring range	Type	Version	Part no.
	-1/+0 bar	DMU 01 VM		31619
	-1/+1.5 bar	DMU 01 VM		31620
	-1/+3 bar	DMU 01 VM		31621
	-1/+5 bar	DMU 01 VM		31622
	0/1 bar	DMU 01 VM		31623
	0/1.6 bar	DMU 01 VM		31624
	0/2.5 bar	DMU 01 VM		31625
	0/4 bar	DMU 01 VM		31626
	0/6 bar	DMU 01 VM		31627
	0/10 bar	DMU 01 VM		31628
	0/16 bar	DMU 01 VM		31629
	0/25 bar	DMU 01 VM		31630

-  in-stock items
-  Non-stock items