



## Pressure transducers HydroFox® DMU 08

Part no. 31562

Pressure transducers

### benefits

- compact and sturdy stainless steel design
- special calibration for all standard pressure units possible
- version with PUR or FEP cable
- high measuring accuracy at excellent price/performance ratio
- watertight up to 10 m water column - ideal for use in flood hazard areas
- Optional Ex version

### Application

For electronic, continuous level measurement, e.g. in wells, drilling holes, water, containers or in waste water systems. Suitable for groundwater, drinking water, waste water (with optional FEP cable), diesel fuel, fuel oil; also for use in flood hazard areas.

### Description

The level indicators HydroFox® DMU 08 use silicon technology and feature calibrated, amplified sensor signals which are available as standardised voltage or current outputs.

### Technical Specifications

#### Measuring accuracy

Deviation from the characteristic curve according to IEC 60770 – limit point calibration (non-linearity, hysteresis, repeatability)  
 $> 0/400 \text{ mbar} < \pm 0.35 \% \text{ FSO}$

#### Measuring range

0/1.6 bar

#### Operating temperature range

Medium:  $-10/+70 \text{ }^{\circ}\text{C}$   
 Ambient:  $-10/+70 \text{ }^{\circ}\text{C}$   
 Storage:  $-25/+70 \text{ }^{\circ}\text{C}$

#### Temperature error band

$> 400 \text{ mbar}$   
 $\leq \pm 0.75 \% \text{ FSO}/10 \text{ K}$  In compensated range  $0/70 \text{ }^{\circ}\text{C}$

#### dynamic characteristics

Response time:  $\leq 10 \text{ ms}$

#### Probe

L x  $\varnothing$ :  $117 \times 24 \text{ mm}$   
 Weight:  $620 \text{ g}$

#### material

Housing: Stainless steel 316 L  
diaphragm: Stainless steel 316 L  
seals: FKM (Viton)  
cable: PUR

#### pressure transmission liquid

Silicone oil

#### Supply voltage

DC 12 – 36 V

#### Output signal

4–20 mA, 2-wire

#### Load

$R_{\max} = [(UB - UB_{\min})/0.02 \text{ A}] \Omega$

#### Options

- Extended weight
- Measuring accuracy 0.1 % FSO
- FEP cable
- Ex version
- screw connector kit
- Junction box
- Anchor clamp

#### Current input

< 25 mA

#### electrical protection

short circuit proof and protected against reverse polarity

#### Electrical connection


PUR cable with integrated breather tube for reference to the ambient atmospheric pressure  
Cable length: 5 m  
Degree of protection: IP 68 (EN 60529)

#### CE conformity

EMC Directive 2014/30/EU  
RoHS Directive 2011/65/EU  
Pressure Equipment Directive 2014/68/EU

### Technical Drawings

**Junction box with pressure relief port**

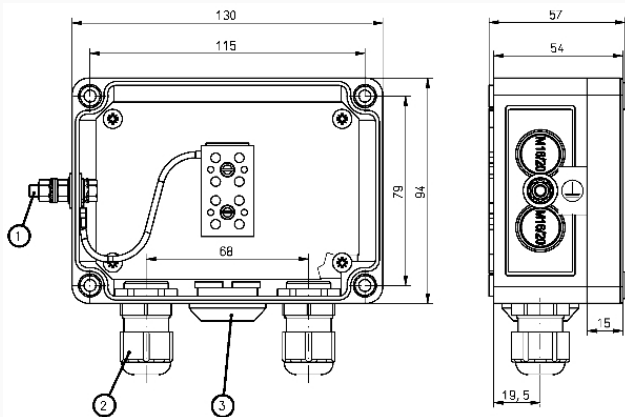

#### Dimensions (mm)

Earth  
Cable gland PG 11  
Pressure compensation element

Versions

|                  |                    | Measuring range | Overload        |                                                                                     | Part no. |
|------------------|--------------------|-----------------|-----------------|-------------------------------------------------------------------------------------|----------|
| HydroFox® DMU 08 | with 5 m PUR cable | 0/1.6 bar       | at least 6 x FS |  | 31562    |

-  in-stock items
-  Non-stock items