


Room thermostat RT 10 D-230 C

Part no. 86063

Room thermostat

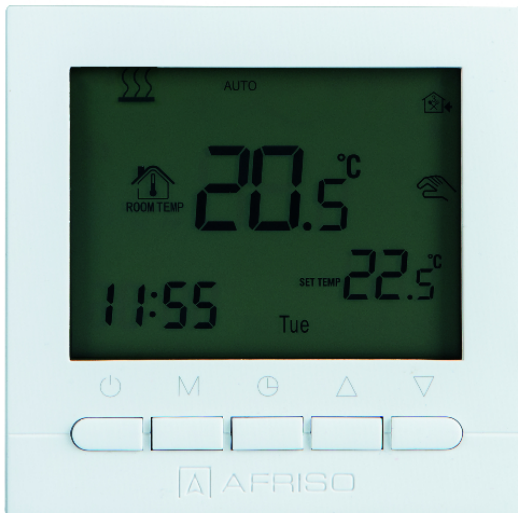

benefits

- easy mounting on standard in-wall switch boxes
- 230 V version
- clear display with heating, cooling and request indicator
- Timer programs can be stored
- suitable for heating and cooling



Application

Determination of the actual ambient temperature and adjustment of the reference value for the room temperature for use in water-based under-floor heating systems, in heating and cooling applications.

Description

The room thermostat RT 10 D-230 C is used in water-based underfloor heating systems in conjunction with thermostatic actuators and/or controller terminal bars (e.g. CosiTherm® Basic WB 10 D-8-230 and WB 01 D). Each room thermostat measures the actual ambient temperature and switches the output to obtain the required reference temperature. The reference value for the room temperature is adjusted by means of the keys. The actual temperature in rooms with an underfloor heating system is compared to the reference temperature on an ongoing basis. In addition to the reference temperature, you can store timer programs (e.g. Day/Night/Heating/Cooling). The display shows values such as temperature, time, heating and cooling mode. Switching between heating and cooling is done either directly on the device or centrally via a potential-free collective contact.

An additional NTC temperature probe can be connected to the RT room thermostat (not included in scope of delivery) which can be used as a floor temperature sensor or as an alternative room temperature sensor, depending on the configuration. Frost protection functions and screed temperature protection functions can also be configured.

Technical Specifications

Programs

- Adjustable for 5 + 2 or 6 + 1 or 7 days

Operating temperature range

Ambient: 5/60 °C

Storage: 5/60 °C

Temperature adjustment range

5/35 °C

Accuracy: ± 0.5 K

Supply voltage

AC 230 V

Contact rating

max. AC 250 V, 3 A

Housing

Plastic (PC)

Colour: white (RAL 9003)


W x H x D: 86 x 86 x 40 mm

Degree of protection: IP 20 (EN 60529)

Weight

165 g

Technical Drawings

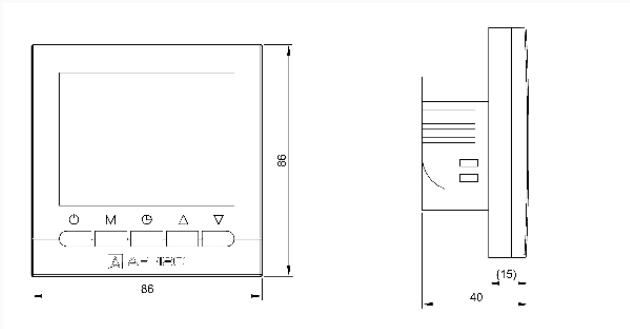

Dimensions (mm)

Versions

Part no.

Room thermostat
RT 10 D-230 C



86063

 in-stock items

 Non-stock items