



room thermostat with housing GRT/ERT/ETR

Part no. 67465X

room thermostat with housing

benefits

- mechanical temperature controller
- for monitoring of greenhouses
- for use in animal breeding applications
- easy wall mounting

Application

Mechanical room thermostat for industrial use. Due to the high degree of protection, the device can be used in humid rooms and in animal breeding applications. The room thermostats are also suitable for temperature monitoring in greenhouses.

Description

The temperature measured at the probe causes a change in the volume of the measuring liquid. Electrical switching is triggered by the force acting.

Technical Specifications

Type

GRT

Operating range

see ordering table

Tolerance

$\pm 0.4\%$ / 10 K

Switching differential

0/55 °C

$\Delta T 3 \pm 1$ K

Setting

GRT/ERT/ETR

External

Probe

Copper, nickel-plated

Probe element

liquid-filled

Operating temperature range

Housing: max. 65 °C

Housing

plastic (PVC), grey (RAL 7035)


Cable entry
plastic (PVC), black
M16 x 1.5

Degree of protection
IP 54 (EN 60529)

electrical switching contact
Changeover contact

Contact rating
NC: AC 250 V, 16 (2.5) A
NO: AC 250 V, 6 (2.5) A

Technical Drawings

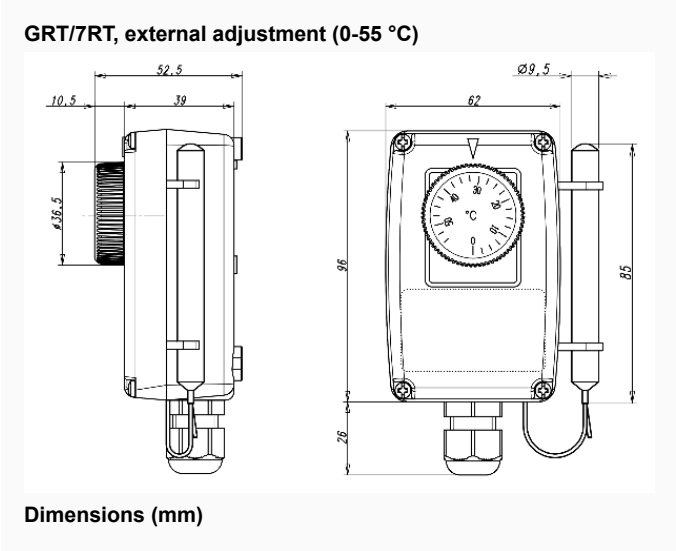

Versions

	adjustment	Operating range	Switching point	Switching point	capillary length	Stem length	Part no.
room thermostat with housing GRT/ERT/ ETR	External	0/55 °C					67465X

-  in-stock items
-  Non-stock items