


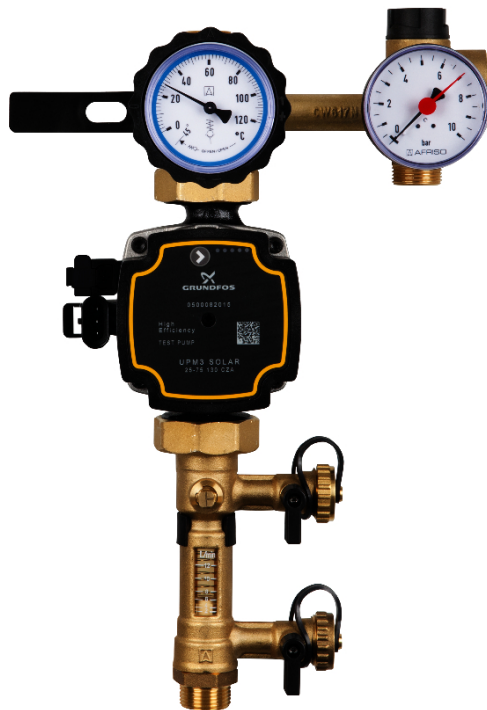

Solar pump line PrimoSol® 130-1

Part no. 77886

Solar pump line

benefits

- pre-assembled, tightness-tested and heat-insulated assembly
- Integrated filling and flushing unit
- easy, fast mounting
- maximum reliability
- ErP-ready: Electronics with increased energy efficiency reduces negative impact on the environment

Application

Solar pump assembly/line for connection of collector and storage tank in intrinsically safe, sealed solar thermal systems. PrimoSol® 130 circulates heat transfer fluids such as water/glycol mixtures in the system.

Description

Complete, pre-assembled and tightness-tested solar pump assembly/line with all required safety and functional components, including form-fit heat insulation.

Depending on the version, the return line (return/cold) consists of:

Circulation pump

Flow meter with ball valve for shut-off, pump end with flange and union nut G1½. Measuring range: 2–12 l/min. With integrated filling and flushing unit, system connection: G¾ male thread.

Combination valve with system connection G3/4 male thread, pump end with flange and union nut G1½. With adjustable gravity brake and thermometer in the hand wheel (blue mark, range 0/120 °C).

Safety group assembly with connection G¾ for expansion vessel. With solar safety valve 6 bar, outlet Rp¾ female thread, pressure gauge Ø 63 mm, 0/10 bar, mounting valve.

The flow line consists of (130-4 only):

Combination valve with adjustable gravity brake and thermometer in the handle (red mark, range 0/120 °C) with system connection G3/4 male thread

Vent pot to remove the gas from the heat transfer fluid with system connection G¾ male. Transparent hose 200 mm as venting aid.

The heat insulation is also used to package the product for protected transport. The safety valve of the safety group assembly complies with Pressure Equipment Directive 2014/68/EC.

Technical Specifications

Axis distance

100 mm

system connectionsG $\frac{3}{4}$ male**Operating temperature range**

Ambient: max. 40 °C

Medium: max. 120 °C

Medium: short-term 160 °C

System pressure

max. 6 bar

Flow meter

2 – 12 l/min

Insulation

Polypropylene EPP

Circulation pump

Grundfos UPM 3 Solar 25-75

Length: 130 mm

Degree of protection: IP 42 (EN 60529)

Supply voltage

AC 230 V, 50 Hz

Power input/pumping head

19 W/4.5 m


28 W/5.5 m

35 W/6.5 m

45 W/7.5 m

Technical Drawings

solar pump line PrimoSol® 130-1

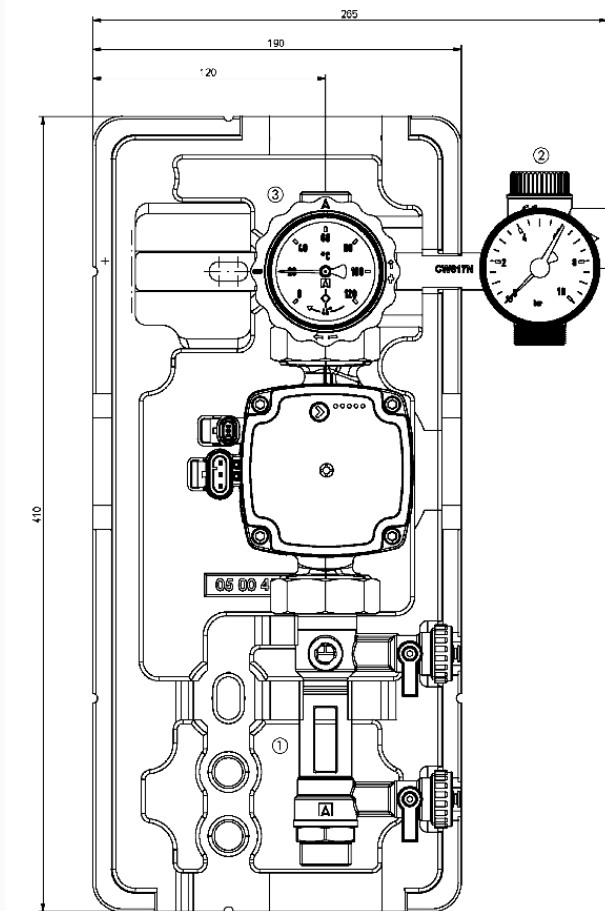

Dimensions (mm)

Flow meter with ball valve as well as filling and flushing unit
Safety group assembly
combination valve with thermometer (return/cold)

Versions

Part no.

Solar pump line
PrimoSol® 130-1

2–12 l/min



77886

● in-stock items

● Non-stock items