


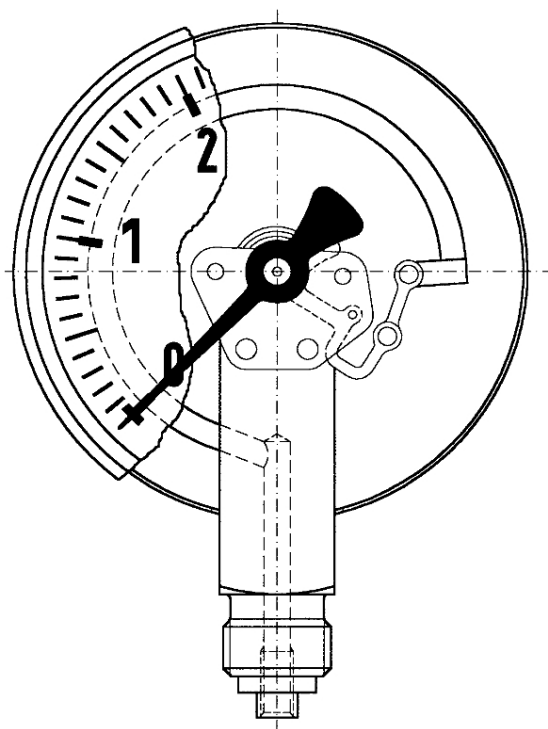

Standard Bourdon tube pressure gauge type D1

benefits

- for pneumatic and heating system applications
- Design as per EN 837-1
- Accuracy class 1.6
- corrosion-resistant, highly impact-resistant plastic housing
- many customised versions available

Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"!

Technical Specifications

Type

D1

Nominal size

100

accuracy class (EN 837-1/6)

1.6

ranges (EN 837-1/5)

see ordering table

application area

static load: $\frac{3}{4}$ x full scale value

dynamic load: $\frac{2}{3}$ x full scale value

short-term: Full scale value

Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx. ± 0.4 %/10 K

falling temperature approx. ± 0.4 %/10 K

of full scale value

Degree of protection

IP 32 (EN 60529)

Connection

Brass, bottom

Measuring element

Bourdon tube, Copper alloy

≤ 60 bar: "C" type tube

> 60 bar: helical tube

movement

Brass

Dial

Plastic, white
Scaling: black

Pointer

Plastic, black

Housing

ABS, black, highly impact-resistant and corrosion-resistant

window


Plastic, clipped in
NG 100
with adjustable red reference pointer

Options

- throttle screw
- Reference pointer
- special scales
- other process connections

Technical Drawings

NG 100 – bottom connection

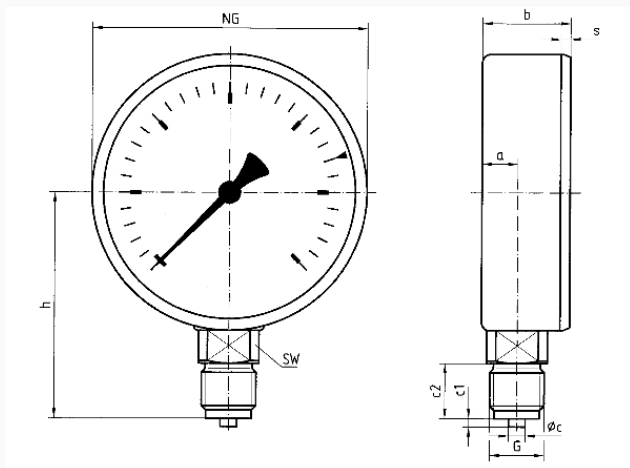

Dimensions (mm)

NG	a	b	øc	c1	c2	G	h	s	SW
100	15,5	34,5	6	3	20	G½B	82	3,5	22

Versions

Range	Mounting type	Type		Part number
-1/+0 bar	direct	RF100 D101	●	85201101
-1/+0.6 bar	direct	RF100 D101	●	85202101
-1/+1.5 bar	direct	RF100 D101	●	85203101
-1/+3 bar	direct	RF100 D101	●	85204101
-1/+5 bar	direct	RF100 D101	●	85205101
-1/+9 bar	direct	RF100 D101	●	85206101
-1/+15 bar	direct	RF100 D101	●	85207101
0/0.6 bar	direct	RF100 D101	●	85209101
0/1 bar	direct	RF100 D101	●	85210101
0/1.6 bar	direct	RF100 D101	●	85211101
0/2.5 bar	direct	RF100 D101	●	85212101
0/4 bar	direct	RF100 D101	●	85213101
0/6 bar	direct	RF100 D101	●	85214101
0/10 bar	direct	RF100 D101	●	85215101
0/16 bar	direct	RF100 D101	●	85216101
0/25 bar	direct	RF100 D101	●	85217101
0/40 bar	direct	RF100 D101	●	85218101
0/60 bar	direct	RF100 D101	●	85219101

0/100 bar	direct	RF100 D101	●	85220101
0/160 bar	direct	RF100 D101	●	85221101
0/250 bar	direct	RF100 D101	●	85222101
0/400 bar	direct	RF100 D101	●	85223101

● in-stock items

● Non-stock items