



Standard Bourdon tube pressure gauges RF40

Part no. 85001211

Standard Bourdon tube pressure gauge type D2

benefits

- for pneumatic and heating system applications (NG 40 - 50 - 63)
- for domestic technology and mechanical engineering applications (NG 80 - 100 - 160)
- robust steel housing
- window with adjustable reference pointer (NG 80 - 100)
- with reference pointer on dial (NG 160)
- Accuracy class 1.6
- many customised versions available

Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys.
! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"!

Technical Specifications

Type
D2

Nominal size
40

accuracy class (EN 837-1/6)
1.6

ranges (EN 837-1/5)
see ordering table

application area
static load: $\frac{3}{4}$ x full scale value
dynamic load: $\frac{2}{3}$ x full scale value
short-term: Full scale value

standard version

Connection
Brass, centre back

Operating temperature range
Medium: max. 60 °C
Ambient: -20/+60 °C

Temperature performance
Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
at rising temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$
falling temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$
of full scale value

Degree of protection
IP 32 (EN 60529)

Measuring element
Bourdon tube, Copper alloy
 $\leq 60 \text{ bar}$: "C" type tube
 $> 60 \text{ bar}$: helical tube

movement

Brass

Dial

NG 40

Plastic, white

D211

black

Scale

D211

Pointer

NG 40

Plastic, black

Housing

Sheet steel, black

push on bezel

NG 40

window

NG 40


Plastic, clipped in

Options

- Panel mounting bezel
- 3-hole fixing, panel mounting bezel
- throttle screw
- Reference pointer
- special scales
- other process connections

Technical Drawings

NG 40/50/63 – centre back connection

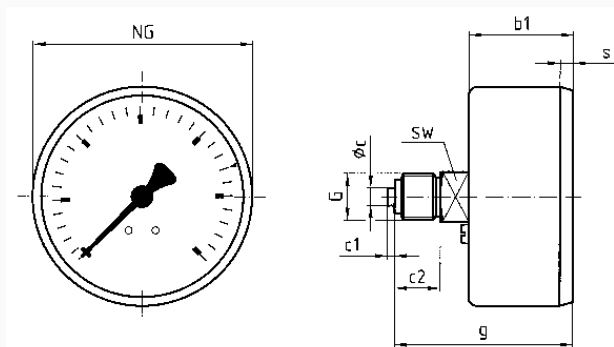

Dimensions (mm)

NG	b1	Øc	c1	c2	g	G	s	SW
40	25	4	2	10	41,5	G $\frac{1}{8}$ B	3	12
50	26	5	2	13	47	G $\frac{1}{4}$ B	3,8	14
63	29,4	5	2	13	50,4	G $\frac{1}{4}$ B	3,7	14

Versions

Range	Mounting type	Type		Part number
-1/+0 bar	direct	RF40 D211		85001211

-  in-stock items
-  Non-stock items