



Standard Bourdon tube pressure gauge type D2

benefits

- for pneumatic and heating system applications (NG 40 - 50 - 63)
- for domestic technology and mechanical engineering applications (NG 80 - 100 - 160)
- robust steel housing
- window with adjustable reference pointer (NG 80 - 100)
- with reference pointer on dial (NG 160)
- Accuracy class 1.6
- many customised versions available

Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"!

Technical Specifications

Type

D2

Nominal size

80

accuracy class (EN 837-1/6)

1.6

ranges (EN 837-1/5)

see ordering table

application area

static load: $\frac{3}{4}$ x full scale value

dynamic load: $\frac{2}{3}$ x full scale value

short-term: Full scale value

Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx. ± 0.4 %/10 K

falling temperature approx. ± 0.4 %/10 K

of full scale value

Degree of protection

IP 32 (EN 60529)

Connection

Brass, bottom

Measuring element

Bourdon tube, Copper alloy

≤ 60 bar: "C" type tube

> 60 bar: helical tube

movement

Brass

Dial

NG 80
Plastic, white
D201
black

Scale

D201

Pointer

NG 80
Plastic, black

Housing

Sheet steel, black

push on bezel

NG 80

window


NG 80
Plastic, clipped in, with adjustable red reference pointer

Options

- Panel mounting bezel
- 3-hole fixing, panel mounting bezel
- throttle screw
- Reference pointer
- special scales
- other process connections

Technical Drawings

NG 80/100 – bottom connection

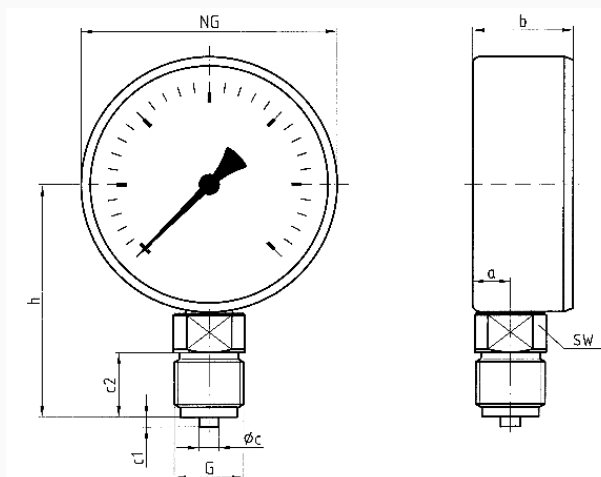

Dimensions (mm)

NG	a	b	Øc	c1	c2	G	h	SW
80	11,7	31	6	3	20	G½B	72	14
100	11	29,5	6	3	20	G½B	82	14

Versions

Range	Mounting type	Type		Part number
-1/+0 bar	direct	RF80 D201		85151201
-1/+0.6 bar	direct	RF80 D201		85152201
-1/+1.5 bar	direct	RF80 D201		85153201
-1/+3 bar	direct	RF80 D201		85154201
-1/+5 bar	direct	RF80 D201		85155201
-1/+9 bar	direct	RF80 D201		85156201
-1/+15 bar	direct	RF80 D201		85157201
0/0.6 bar	direct	RF80 D201		85159201
0/1 bar	direct	RF80 D201		85160201
0/1.6 bar	direct	RF80 D201		85161201
0/2.5 bar	direct	RF80 D201		85162201
0/4 bar	direct	RF80 D201		85163201
0/6 bar	direct	RF80 D201		85164201
0/10 bar	direct	RF80 D201		85165201
0/16 bar	direct	RF80 D201		85166201
0/25 bar	direct	RF80 D201		85167201
0/40 bar	direct	RF80 D201		85168201
0/60 bar	direct	RF80 D201		85169201

0/100 bar	direct	RF80 D201	●	85170201
0/160 bar	direct	RF80 D201	●	85171201
0/250 bar	direct	RF80 D201	●	85172201
0/400 bar	direct	RF80 D201	●	85173201

- in-stock items
- Non-stock items