



Standard capsule type pressure gauges for differential pressure type D4

benefits

- Measurement of extremely small differential pressures
- robust design
- static pressures up to 400 mbar
- direct indication of the differential pressure
- many customised versions available

Application

For differential pressure measurement of non-corrosive, gaseous, dry media. Especially suitable for filter loss measurement in air conditioning and ventilation applications.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

Technical Specifications

Type

D4

Nominal size

100

Function

The "plus" pressure (= high pressure) is applied to the inside of the diaphragm. The "minus" pressure (= low pressure) is applied to the inside of the pressure-tight housing. The pressure difference causes the diaphragm to change its shape, thus generating the movement required to measure the pressure. This displacement is picked up by the movement. The differential pressure is directly indicated by a pointer.

accuracy class

EN 837-3/6
1.6

ranges (EN 837-3/5)

see ordering table

application area

static load: Full scale value

dynamic load: 0.9 x full scale value

Overpressure safety

Full scale value

maximum static pressure

400 mbar

Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
at rising temperature approx. $\pm 0.6 \text{ \%}/10 \text{ K}$
falling temperature approx. $\pm 0.6 \text{ \%}/10 \text{ K}$
of full scale value

Degree of protection

IP 66 (EN 60529)

Connection

stainless steel 316 Ti/316 L
bottom, parallel, one behind the other
2 x G $\frac{1}{2}$ B, SW22 (EN 837-3/7.3)

Measuring element (wetted part)

Capsule element, CuBe alloy

Movement (wetted part)

Brass

Zero correction

from the front

Seal (wetted part)

NBR (Perbunan)

Dial (wetted part)

Aluminium, white
Scaling: black

Pointer (wetted part)

Aluminium, black

Housing (wetted part)

Stainless steel 304

bayonet bezel

Stainless steel 304

Window (wetted part)


Plastic (PMMA)

Options

- back flange
- 3-hole fixing, panel mounting bezel
- hose connections
- special scales
- other process connections

Technical Drawings

NG 100/160 – bottom connection

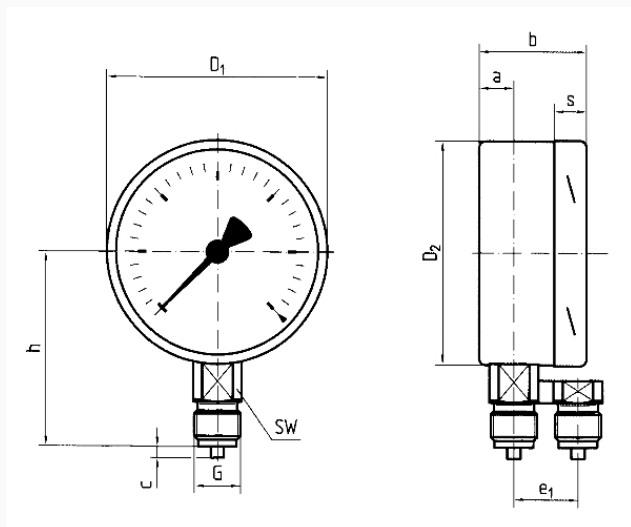

Dimensions (mm)

NG	a	b	c	D1	D2	e1	G	h	s	SW
100	16	49	3	101	99	32	G½B	86	20	22
160	16	49	3	161	159	32	G½B	118	20	22

Versions

			housing ø	Housing	accura- cy class	Connek- tion	Ausrich- tung	Range	Type		Part no.
KP100Dif	D401		100 mm	Stain- less steel 304	1.6	2 x G½B		0/25 mbar	KP100Dif D401	●	35566401
KP100Dif	D401		100 mm	Stain- less steel 304	1.6	2 x G½B		0/40 mbar	KP100Dif D401	●	35567401
KP100Dif	D401		100 mm	Stain- less steel 304	1.6	2 x G½B		0/60 mbar	KP100Dif D401	●	35568401
KP100Dif	D401		100 mm	Stain- less steel 304	1.6	2 x G½B		0/100 mbar	KP100Dif D401	●	35569401
KP100Dif	D401		100 mm	Stain- less steel 304	1.6	2 x G½B		0/160 mbar	KP100Dif D401	●	35570401
KP100Dif	D401		100 mm	Stain- less steel 304	1.6	2 x G½B		0/250 mbar	KP100Dif D401	●	35571401
KP100Dif	D401		100 mm	Stain- less steel 304	1.6	2 x G½B		0/400 mbar	KP100Dif D401	●	35572401

● in-stock items

● Non-stock items