



Standard diaphragm pressure gauge type D8 with glycerine filling

benefits

- Overpressure safety 10 bar
- smallest ranges
- robust and compact design
- wetted area without seals due to welding
- Ex version (optional)

Technical Specifications

Type
D8

Nominal size
160

accuracy class (EN 837-3/6)
1.6

ranges (EN 837-3/5)
see ordering table

application area
static load: Full scale value
dynamic load: 0.9 x full scale value

Operating temperature range
Medium: max. 100 °C
Ambient: -20/+60 °C

Temperature performance
Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
at rising temperature approx. $\pm 0.8 \text{ } \%/10 \text{ K}$
falling temperature approx. $\pm 0.8 \text{ } \%/10 \text{ K}$
of full scale value

Degree of protection
IP 54 (EN 60529)

Connection
Steel, bottom
G $\frac{1}{2}$ B, SW22 (EN 837-3/7.3)

lower measuring flange
Steel

upper measuring flange
Stainless steel 304

Measuring element
diaphragm

Seal
NBR (Perbunan)

movement
Brass

Dial
Aluminium, white
Scaling: black

Pointer

Aluminium, black

Housing

Stainless steel 304, with blow-out

bayonet bezel

Stainless steel 304

window

Instrument glass

filling liquid


Glycerine

Options

- Safety housing
- Overpressure safety 10 x FSD (measuring flange $\varnothing$ 100 to max. 40 bar, measuring flange $\varnothing$ 160 to max. 2.5 bar)
- Glycerine filling (≥ 40 mbar, ≤ 250 mbar accuracy class 2.5)
- Electrical contacts
- wetted parts with special coating
- open connection flanges as per EN/ASME

Technical Drawings

bottom connection, measuring flange $\varnothing$ 160

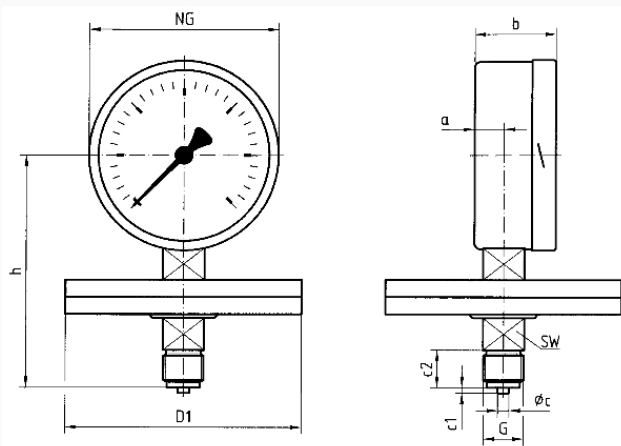

Dimensions (mm)

NG	a	b	$\varnothing c$	c1	c2	D1	G	h	SW
160	20	55	6	3	20	160	G $\frac{1}{2}$ B	156	22

Versions

Range	Mounting type	Type		Part number
0/40 mbar	direct	PF160Gly D801	●	85954801
0/60 mbar	direct	PF160Gly D801	●	85955801
0/100 mbar	direct	PF160Gly D801	●	85956801
0/160 mbar	direct	PF160Gly D801	●	85957801
0/250 mbar	direct	PF160Gly D801	●	85958801

● in-stock items

● Non-stock items