


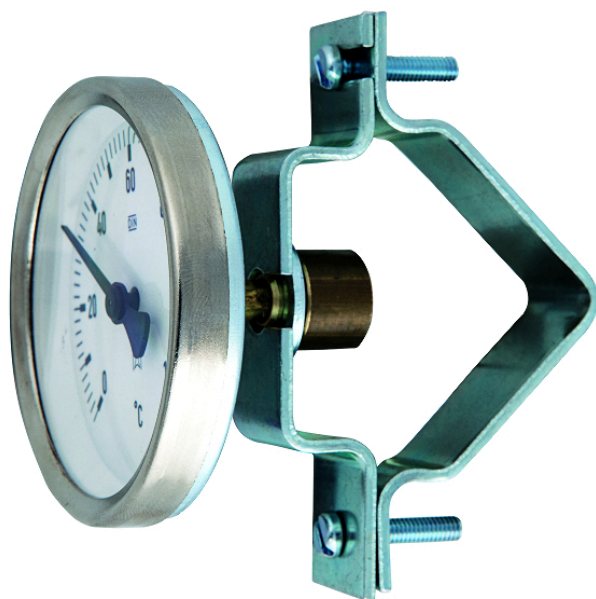

Surface mount thermometers

benefits

- ranges: -20/+40, 0/60, 0/120 °C
- connection either with heat-conducting element and fastening spring, universal clamp for pipes 3/8" to 1½" or two magnets Ø 20 mm

Application

Heating, ventilation and plumbing. Fastening by means of spring (ATH Ø F), magnet (ATH Ø M) or universal clamp (ATH Ø S)

Technical Specifications

Nominal size

63

measuring element

Bimetal spiral

accuracy class

2 (EN 13190)

application area

Full scale value

Connection

ATH ø S

universal clamp, for pipes 3/8" to 1½"

mounting position

centre back

Options

- other ranges
- Plastic housing

Dial

Plastic, white
Scaling: black

Pointer

Plastic, black

Housing

ATH ø S
Sheet steel, galvanised


push on bezel

Sheet steel, nickel-plated

window

Plastic

Technical Drawings

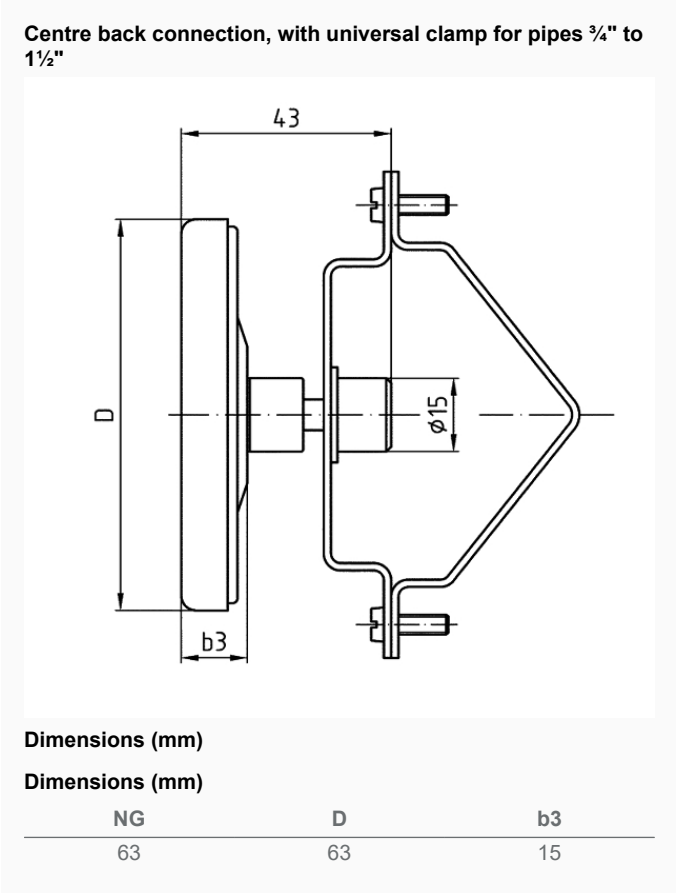

Versions

housing ø	Connection	Connection	Range	dial	Type	Part no.
63 mm	universal clamp	for pipes 3/4" to 1 1/2"	0/120 °C	black	ATH 63 S	63820

- in-stock items
- Non-stock items