



## Standard capsule pressure gauges KP100

Part no. 35105451

Standard capsule pressure gauges Type D4

### benefits

- with zero correction
- optional overpressure and/or underpressure safety 10 x FSD
- extremely low measuring ranges from 0/6 mbar
- GOSSTANDART-certified

### Application

For gaseous, dry media which do not attack copper alloys.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

### Technical Specifications

#### Type

D4

#### Nominal size

100

#### accuracy class (EN 837-3/6)

1.6

#### ranges (EN 837-3/5)

see ordering table

#### application area

static load: Full scale value

dynamic load: 0.9 x full scale value

overload safety: 1.3 x full scale value

#### Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

#### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx.  $\pm 0.6 \text{ } \%/10 \text{ K}$

falling temperature approx.  $\pm 0.6 \text{ } \%/10 \text{ K}$

of full scale value

#### Degree of protection

NG 100

IP 54 (EN 60529)

#### Connection

Brass, centre back

#### Measuring element

Capsule element, CuBe alloy

#### movement

Brass

#### Zero correction

from the front

**Seal**  
NBR (Perbunan)

**Dial**  
Aluminium, white  
Scaling: black

**Pointer**  
Aluminium, black

**Housing**  
Stainless steel 304

**bayonet bezel**  
Stainless steel 304


**window**  
D451  
Plastic (PMMA)

## Options

- overpressure and underpressure safety 10 x FSD
- back flange
- Panel mounting bezel, with window, plastic
- 3-hole fixing, panel mounting bezel with window, plastic
- throttle screw
- Reference pointer
- special scales
- other process connections

## Technical Drawings

**Centre back connection, panel mounting bezel with clamp fixing**

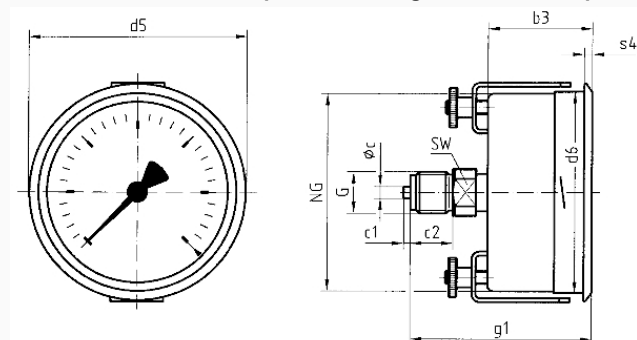

**Dimensions (mm)**

| NG  | b3 | Øc | c1 | c2 | d5  | d6  | G                 | g1 | s4  | SW |
|-----|----|----|----|----|-----|-----|-------------------|----|-----|----|
| 63  | 37 | 5  | 2  | 13 | 68  | 64  | G $\frac{1}{4}$ B | 60 | 3   | 14 |
| 100 | 49 | 6  | 3  | 20 | 107 | 101 | G $\frac{1}{2}$ B | 81 | 4   | 22 |
| 160 | 52 | 6  | 3  | 20 | 167 | 161 | G $\frac{1}{2}$ B | 84 | 4,5 | 22 |

Versions

| Range       | Mounting type                              | Type          |                                                                                     | Part number |
|-------------|--------------------------------------------|---------------|-------------------------------------------------------------------------------------|-------------|
| -40/+0 mbar | Panel mounting bezel,<br>with clamp fixing | KP100<br>D451 |  | 35105451    |

-  in-stock items
-  Non-stock items