


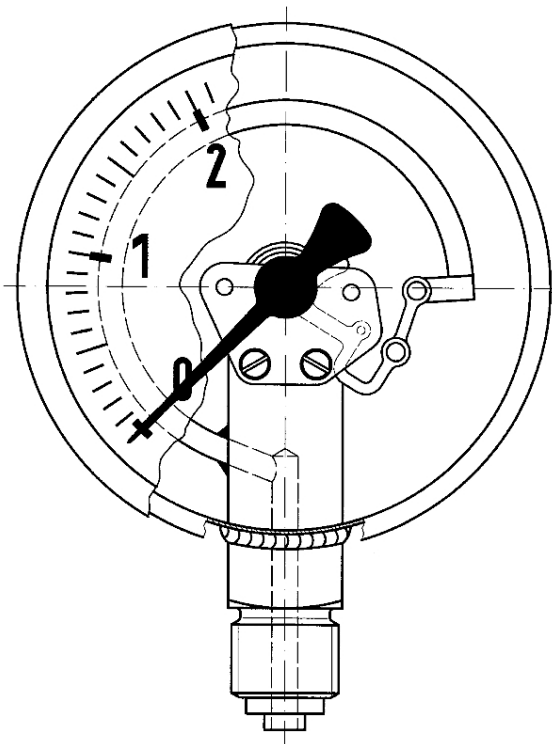

## Bourdon tube pressure gauges for chemical applications RF50Ch

Part no. 85051932

Bourdon tube pressure gauges for chemical applications Type D9

### benefits

- for chemical and process engineering applications
- measuring system fully welded to housing
- extremely robust design
- for temperatures of the medium of up to 200 °C
- tightness-tested with helium
- GOSSTANDART-certified
- Ex version (optional)

### Application

For corrosive gaseous and liquid media which are not highly viscous and do not crystallise; suitable for corrosive environments.  
! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"!

### Technical Specifications

**Type**  
D9

**Nominal size**  
50

**accuracy class**  
EN 837-1/6  
NG 50  
1.6

**ranges (EN 837-1/5)**  
see ordering table

**application area**  
static load:  $\frac{3}{4}$  x full scale value  
dynamic load:  $\frac{2}{3}$  x full scale value  
short-term: Full scale value

### Operating temperature range

NG 50  
max. 150 °C  
Ambient: -20/+60 °C

### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:  
at rising temperature approx.  $\pm 0.4$  %/10 K  
falling temperature approx.  $\pm 0.4$  %/10 K  
of full scale value

### Degree of protection

IP 54 (EN 60529) with housing vent ( $\leq 25$  bar)

### Connection

Stainless steel 316 L, bottom back

#### Measuring element

Bourdon tube, stainless steel 316 Ti/316 L  
 ≤ 60 bar: "C" type tube  
 > 60 bar: helical tube  
 tightness-tested with helium

#### movement

Stainless steel

#### Dial

Aluminium, white  
 Scaling: black

#### Pointer

Aluminium, black

#### Housing

Stainless steel 304, with blow-out

#### bayonet bezel

NG 50  
 Stainless steel 304

#### crimped bezel

NG 50

#### window


NG 50  
 Plastic

### Options

- Brass movement
- Back flange (NG 63)
- clamp fixing
- Ex version
- Crimped bezel, polished
- special scales
- other process connections

### Technical Drawings

**NG 50 – bottom back connection, 3-hole fixing, panel mounting bezel**

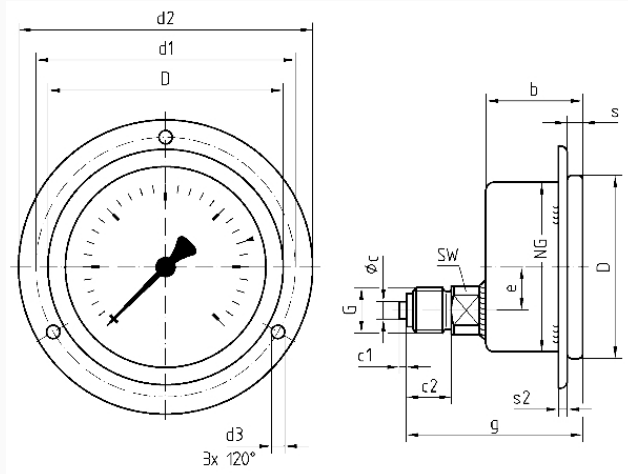

#### Dimensions (mm)

| NG | b  | Øc | c1 | c2 | d1* | d2* | d3* | D  | e    | G       | g  | s   | s2  | SW |
|----|----|----|----|----|-----|-----|-----|----|------|---------|----|-----|-----|----|
| 50 | 28 | 5  | 2  | 13 | 60  | 70  | 3,6 | 53 | 12,5 | G 1/4 B | 51 | 4,5 | 2,5 | 14 |

\* Dimensions as per DIN 16063

Versions

| Range     | Mounting type                       | Type        |                                                                                     | Part number |
|-----------|-------------------------------------|-------------|-------------------------------------------------------------------------------------|-------------|
| -1/+0 bar | 3-hole fixing, panel mounting bezel | RF50Ch D932 |  | 85051932    |

-  in-stock items
-  Non-stock items