


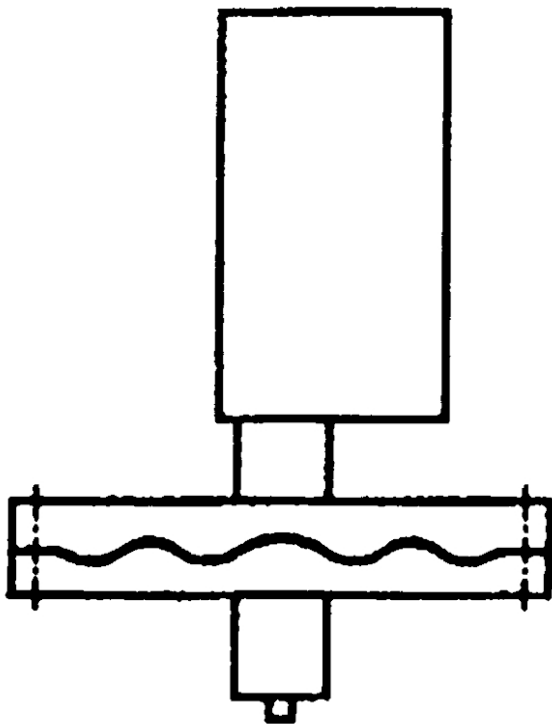

## Diaphragm pressure gauges for chemical applications PF100ChGly

Part no. 85905802

Diaphragm pressure gauges for chemical applications  
Type D8 with glycerine filling

### benefits

- for low pressure ranges
- high overload protection
- high resistance
- optional flange connections

### Technical Specifications

**Type**  
D8

**Nominal size**  
100

**accuracy class (EN 837-3/6)**  
1.6

**ranges (EN 837-3/5)**  
see ordering table

**application area**  
static load: Full scale value  
dynamic load: 0.9 x full scale value

**Overpressure safety**  
≤ 6 bar  
at least 5 x FS

**Operating temperature range**  
Medium: max. 100 °C  
Ambient: -20/+60 °C

### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:  
at rising temperature approx. ± 0.8 %/10 K  
falling temperature approx. ± 0.8 %/10 K  
of full scale value

**Degree of protection**  
IP 54 (EN 60529)

**Connection**  
stainless steel 316 Ti/316 L, bottom  
G½B, SW22 (EN 837-3/7.3)

**lower measuring flange**  
stainless steel 316 Ti/316 L

**upper measuring flange**  
Stainless steel 304

**Measuring element**  
diaphragm  
measuring flange ø 160  
stainless steel 316 Ti/316 L

**Seal**  
FPM (Viton)

**movement**

Stainless steel

**Dial**

Aluminium, white

Scaling: black

**Pointer**

Aluminium, black

**Housing**

Stainless steel 304, with blow-out

**bayonet bezel**

Stainless steel 304

**window**

Laminated safety glass

**filling liquid**


Glycerine

**Options**

- Safety housing
- Overpressure safety 10 x FSD (measuring flange  $\varnothing$  100 to max. 40 bar, measuring flange  $\varnothing$  160 to max. 2.5 bar)
- Glycerine filling ( $\geq 40$  mbar,  $\leq 250$  mbar accuracy class 2.5)
- Electrical contacts
- wetted parts with special coating
- open connection flanges as per EN/ASME

**Technical Drawings**

**bottom connection, measuring flange  $\varnothing$  100**

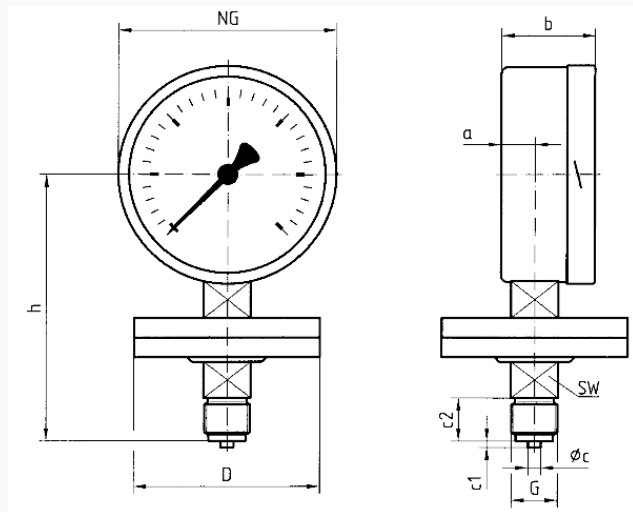

**Dimensions (mm)**

| NG  | a  | b  | $\varnothing c$ | c1 | c2 | D   | G                 | h   | SW |
|-----|----|----|-----------------|----|----|-----|-------------------|-----|----|
| 100 | 20 | 55 | 6               | 3  | 20 | 100 | G $\frac{1}{2}$ B | 127 | 22 |

Versions

| Range     | Mounting type | Type               |                                                                                     | Part number |
|-----------|---------------|--------------------|-------------------------------------------------------------------------------------|-------------|
| 0/60 mbar | direct        | PF100ChGly<br>D802 |  | 85905802    |

-  in-stock items
-  Non-stock items