


Heating pump assembly PrimoTherm® 180-1 DN 25 GP

Part no. 77645

Heating pump assembly

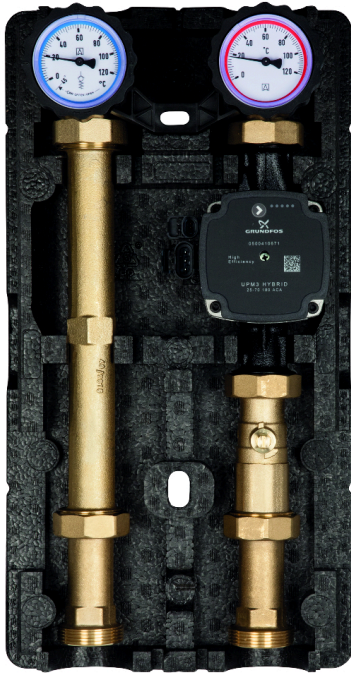

benefits

- pre-assembled, tightness-tested and heat-insulated assembly
- modular system with flow at left or right
- easy, fast mounting
- with high-efficiency pump class A
- eligible for heating optimization program (BAFA)

Application

Heating pump assembly for use in non-mixed heating circuits, specially for storage tank charging. It connects the heating boiler and the pipe system.

Description

Complete, pre-assembled and tightness-tested heating pump assembly with all required functional components, form-fit insulation and wall mounting unit.

The pump line (flow/hot) consists of:

Combination valve with thermometer in the hand wheel (red mark, range 0/120 °C)

Ball valve below the pump

Pipe for length compensation with screw connection

System connection G1½ male (boiler), G1 female (heating circuit)

Suitable for pumps DN 25 with G1½ x 180 mm.

The return line consists of:

Combination valve with gravity brake, thermometer in the handle (blue mark, range 0/120 °C)

Pipe for length compensation (pump/mixer) with screw connection

System connection G1½ male (boiler), G1 female (heating circuit)

Technical Specifications

Axis distance

125 mm

system connections

Boiler: G1½ male

Heating circuit: G1 female

Operating temperature range

Medium: max. 110 °C

System pressure

max. 10 bar

Nominal size

DN 25

Flow coefficient Kvs

4.8 m³/h

Insulation

Polypropylene EPP

Dimensions

W x H x D: 250 x 475 x 152 mm

Circulation pump

Grundfos UPM3 HYBRID 25-70/180

Length

180 mm

Degree of protection

IP 44 (EN 60529)

Supply voltage

AC 230 V, 50 Hz

Options

- Mixer and actuator, can be retrofitted
- other circulation pumps

Energy efficiency class

A

Power input

Grundfos UPM3 HYBRID 25-70/180
2 – 52 W

pumping head

Grundfos UPM3 HYBRID 25-70/180
7 m

pumping volume

Grundfos UPM3 HYBRID 25-70/180
max. 3.6 m³/h

operating modes/settings


Grundfos UPM3 HYBRID 25-70/180
PWM-A (4),
PWM-C (4),
constant volume flow PP (3),
constant pressure CP (3),
constant speed of rotation (3)

Options

- Mixer and actuator, can be retrofitted
- other circulation pumps

Technical Drawings

PrimoTherm® 180-1 with Grundfos pump

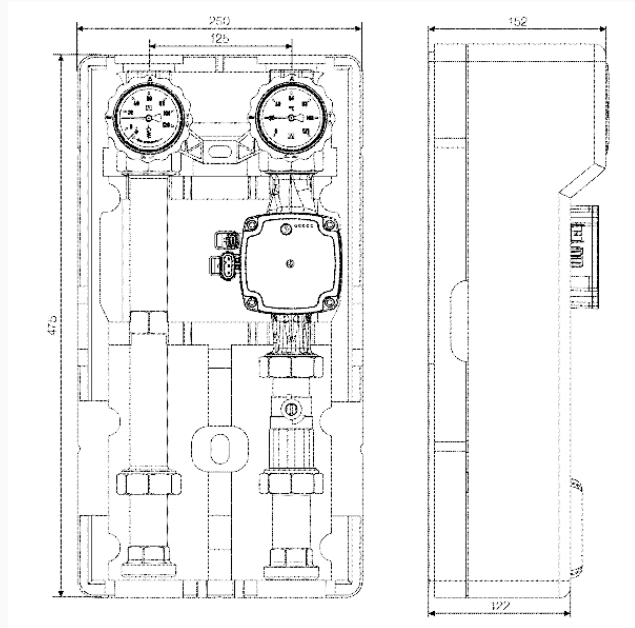

Dimensions (mm)

Versions

	opening temperature is reached	Pump	Part no.
Heating pump assembly PrimoTherm® 180-1 DN 25 GP		Grundfos UPM3 HYBRID 25-70/180	77645

- in-stock items
- Non-stock items