



plug-in display DA 06 Ex

Part no. 31279

digital plug-in display

benefits

- easy and fast mounting via plug-in system
- Indication scalable as required
- Housing and display can be rotated at any angle
- Open collector switching output / PNP

Application

Cost-effective digital display unit with local indication for all transducers with 4–20 mA output and ISO 4400 (DIN 43650-A) connector. Easy and fast mounting via plug-in system. Optional EX protection (zones 0/1) and connector M 12 x 1, 5-pin.

Description

DA 06 is mounted between the plug and the junction box and is immediately ready for operation. As the unit is supplied via the 4–20 mA loop, it does not require a separate power supply. The unit is programmed by means of two keys at the front. The following parameters can be set: scaling, decimal point, dampening, switching point and delay. In addition, the unit features a memory for min. and max. values. The settings are not lost in case of a power outage. Out of range values can be displayed as messages (both ends of the range). The integrated diagnostics system continuously monitors all functions of the display. The housing can be turned by 300°, the display by 330°.

Technical Specifications

Display

4-digit, 7 mm high, red LED display,
Display housing can be rotated by 330°

Range

0 to 9,999 digits,
start and end values configurable as required

Accuracy

0.1 % ±1 digit

adjustable parameters

Scaling decimal point Damping Switching point Delay

Min./max. value memory

the highest and lowest values reached during operation can be displayed

Housing

plastic (PA 6.6/polycarbonate)
W x H x D: 47 x 47 x 68 mm
Housing can be rotated by 300°

Degree of protection

IP 65 (EN 60529)

Operating temperature range

DA 06 Ex
-25/+70 °C
Storage: -40/+85 °C

Electrical connection

Adapter for connector as per ISO 4400 (DIN 43650-A)

Input signal/output signal

4–20 mA, 2-wire

Options

- EX protection II 2G Ex ia IIC T4 Gb
- electrical connection M12 x 1, 5-pin
- 3-wire 0–10 V


Switching output

1 open collector (PNP), max. 125 mA
(no external power may be supplied for Ex protection)
On/off delay 0 to 100 s

CE conformity (EMC)

EMC Directive 2014/30/EU

Technical Drawings

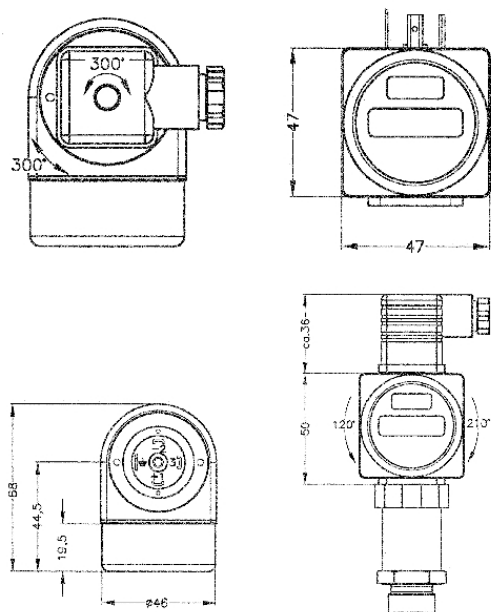

Dimensions (mm)

Versions

	Part no.
plug-in display DA 06 Ex	31279

- ☒ in-stock items
- ☐ Non-stock items