



## Bourdon tube pressure gauge RF100ISR

Part no. 85311101

Bourdon tube pressure gauge with screw bezel housing type D1

### benefits

- for machine and plant engineering
- extremely robust plastic housing (PA 6.6 GB30)
- laminated safety glass window
- higher accuracy class optional

### Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys. For high measuring accuracy.  
! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"

### Technical Specifications

#### Type

D1

#### Nominal size

100

#### accuracy class (EN 837-1/6)

1.0

#### ranges (EN 837-1/5)

see ordering table

#### application area

≤ 600 bar: Full scale value  
> 600 bar:  $\frac{3}{4}$  x full scale value  
≤ 600 bar: 0.9 x full scale value  
> 600 bar:  $\frac{2}{3}$  x full scale value  
≤ 600 bar: 1.3 x full scale value  
> 600 bar: Full scale value

#### Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

#### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:  
at rising temperature approx. ± 0.4 %/10 K  
falling temperature approx. ± 0.4 %/10 K  
of full scale value

#### Degree of protection

IP 54 (EN 60529) with housing vent (≤ 25 bar)

#### Connection

Brass, bottom

#### Measuring element

Bourdon tube

≤ 60 bar: "C" type tube, Copper alloy

> 60 bar: helical tube, stainless steel 316 Ti/316 L

#### movement

Brass

#### Dial

Aluminium, white

Scaling: black

#### Pointer

Aluminium, black

#### Housing

plastic (PA 6.6 GB30), with blow-out

#### Screw type bezel

plastic (PA 6.6 GB30)

#### window


Laminated safety glass

### Options

- Glycerine filling (type D 6)
- higher accuracy class
- throttle screw
- special scales
- other process connections
- micro-adjustable pointer

### Technical Drawings

#### Bottom connection

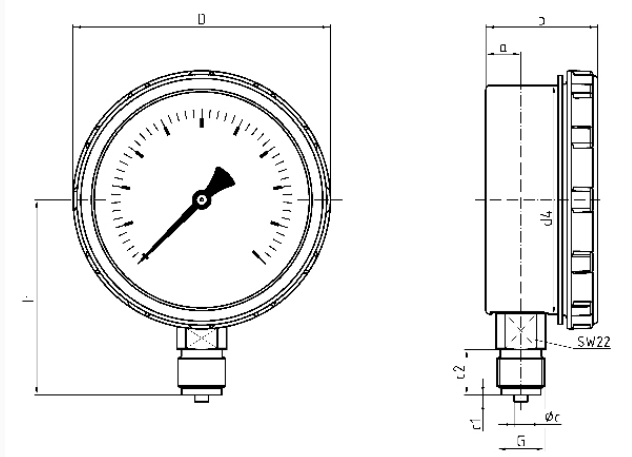

#### Dimensions (mm)

| NG  | a    | b  | Øc | c1 | c2 | d4  | D   | G   | h  |
|-----|------|----|----|----|----|-----|-----|-----|----|
| 100 | 15,5 | 50 | 6  | 3  | 20 | 101 | 114 | G½B | 86 |

### Versions

| Range     | Mounting type | Type             | Part number |
|-----------|---------------|------------------|-------------|
| 0/1.6 bar | direct        | RF100ISR<br>D101 | 85311101    |

- in-stock items
- Non-stock items